
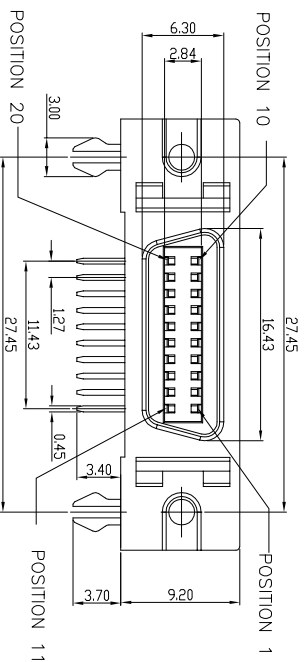
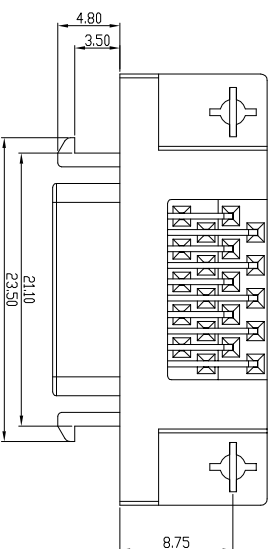


1. ELECTRICAL CHARACTERISTICS;
 - 1.1 CONTACT RATING:30 VAC
 - 1.2 CONTACT CURRENT RATING:0.5A
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 60S.
 - 1.4 INSULATION RESISTANCE 500MΩ MIN INITIAL
 - 1.5 OPERATING TEMPERATURE:-45°C ~ 85°C

2. PLATING

- 2.1 TERMINAL:50u" MIN NICKEL ALL OVER
80u" MIN Tin ON SOLDER AREA
1u" GOLD ON CONTACT AREA
- 2.2 SHELL:100u"MIN.NICKEL OVER 50"MIN COPPER

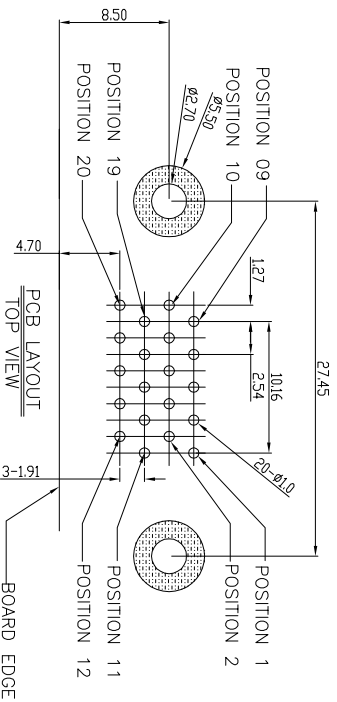

4	SHELL	ZINC ALLOY NI Plated	1	pcs
3	CONTACT	COPPER ALLOY(T=0.30mm)	20	pcs
2	COVER	LCP BLACK UL94-V0	1	pcs
1	INSULATOR	PBT BLACK UL 94V-0	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO
	SCALE:	N:1	DATE:	2023/03/11	Huangmei	Juck Chen		
x. ±0.60								B03-020


东莞市箐国电子有限公司
www.kinkuo.com

A	A	2023/03/11	NEW ISSUE
	REV	DATE	DESCRIPTION
			APPROVER
			Jock Chen

QUALITY SYMBOLS	
 :	 :
CRITICAL	MAJOR
 :	 :
ZERO DEFECT	S.P.C

	± 0.40	$\times$
	± 0.25	$\times$