


ROHS

P1

L

P2

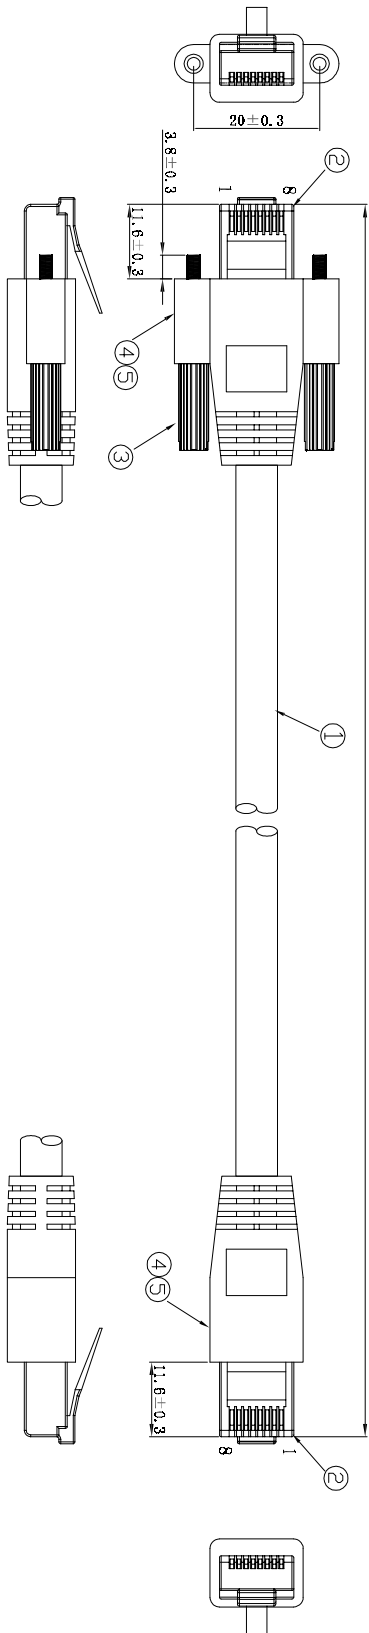

PIN ASSIGNMENT

P1		P2	
1	BROWN/WHITE	1	
2	ORANGE	2	
3	GREEN/WHITE	3	
4	GREEN	4	
5	BLUE	5	
6	BLUE/WHITE	6	
7	BROWN/WHITE	7	
8	BROWN	8	
	BRAID		SHELL

Length and Part number:

No	Part No:	Length (MM)
1	A15-080M1208-2.0M	2000±30
2	A15-080M1208-3.0M	3000±35
3	A15-080M1208-5.0M	5000±50
5	A15-080M1208-8.0M	8000±100
6	A15-080M1208-10.0M	10000±150

NOTES:

- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
- CONDUCTOR RESISTANCE: 5 OHMS MAX.
- INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
- THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

			QUALITY SYMBOLS		Tolerance		REV: A UNIT: mm DRW BY CHK BY APP BY DRAWING NO.				
			☐ :	☒ :	x.	±0.60	SCALE: N:1 DATE: 2024/03/22 Huangmei Jack Chen A15-080				
			CRITICAL	MAJOR	.x	±0.40	Kinkuo 东莞市箐国电子有限公司 www.kinkuo.com				
Δ	2024/03/22	NEW ISSUE	jack Chen		.xx	±0.25					
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	 					



东莞市箐国电子有限公司

www.kinkuo.com