
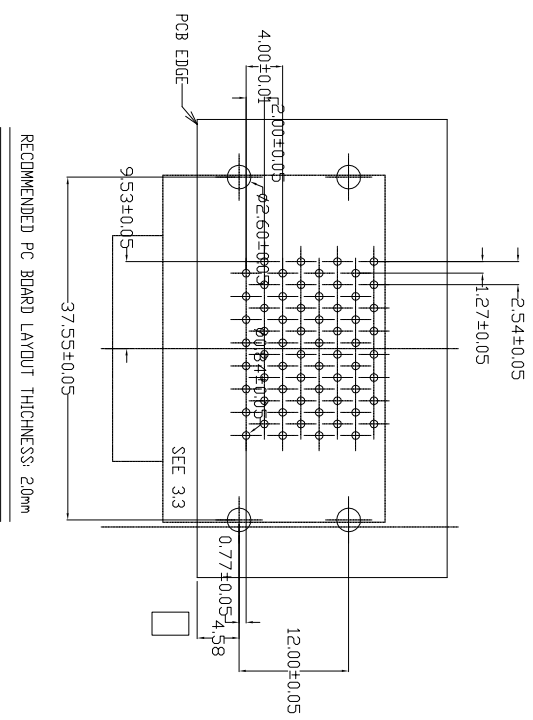


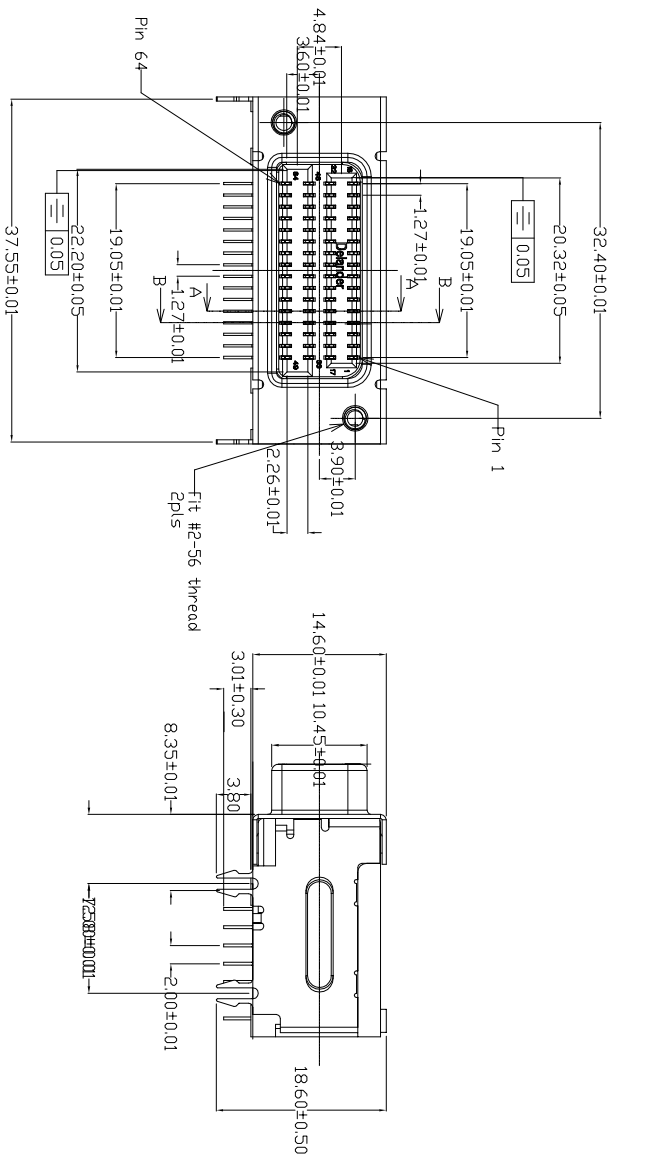



NOTES:

- 10. RATING:
 - 11. VOLTAGE : 250 VAC(RMS)
 - 12. CURRENT : 0.5Amp Max
 - 13. TEMPERATURE: -55°C-85°C
- 20. ELECTRIC CHARACTERISTIC:
 - CONTACT RESISTANCE: 45mΩ MAXIMUM INITIAL/60mΩ MAXIMUM AFTER
 - INSULATION RESISTANCE: 1000MΩ MINIMUM
 - 21. DIELECTRIC STRENGTH: 1000VAC PIN TO PIN FOR 1 MINUTE MIN
 - 1500 VAC PIN TO GROUND FOR 1 MINUTE MIN
- 30. MATERIALS: SEE TABLE B
- 40. FINISHS: SEE TABLE B

5.0. OTHERS:

- 5.1. DATU MAND BASIC DIMENSIONS ESTABLISHED BY AQCN DESIGN.
- 5.2. PRODUCT NUMBERING CODE : REFER TO TABLE A

9	LUNG CONTACT	8	T-HBR2B-B00X00	T-HBR2B-00-00	CS19R-H/Au 30u'
8	SHOET CONTACT	8	T-HBR2B-A00X00	T-HBR2B-00-00	CS19R-H/Au 30u'
7	SHELL	1	S-HBR2B-F64X00	S-HBR2B-00-00	SPCC/NI
6	PRESS BOARD 2	8	I-HBR2B-B64X01	I-HBR2B-02-00	LCP E130U/BLACK
5	PRESS BOARD 1	9	I-HBR2B-B64X00	I-HBR2B-01-00	LCP E130U/BLACK
4	HOUSING	1	I-HBR2B-A64X00	I-HBR2B-00-00	LCP E130U/BLACK
3	RIGHT BLARD LOCK	1	H-HBR2B-R00X00	H-HBR2B-01-00	CS680R-H/NI
2	TETRAQON NUT	2	H-HBR2B-N00X00	H-HBR2B-02-00	CS680R-H/5n
1	LEFT BOARD LOCK	1	H-HBR2B-L00X00	H-HBR2B-00-00	CS680R-H/5n

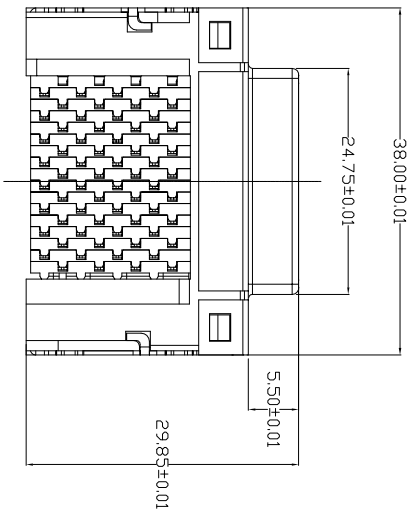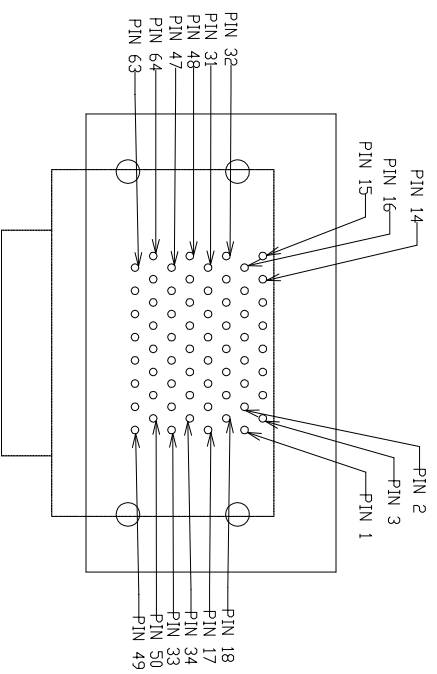

NAME:	HALF PITCH 64PIN FEMALE R/A TYPE	PART NO.	B10-HBF06401-11
-------	----------------------------------	----------	-----------------

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		B10-064



东莞市箐国电子有限公司

www.kinkuo.com

QUALITY SYMBOLS	Tolerance
□ :	x.
⊠ :	x.
▽ :	.xx
CRITICAL	±0.60
MAJOR	±0.40
S.P.C	±0.25

APPROVER	Jack Chen
DATE	2018/03/11
DESCRIPTION	NEW ISSUE
SIDE	8