

8

7

6

5




4

3

2

1

ROHS

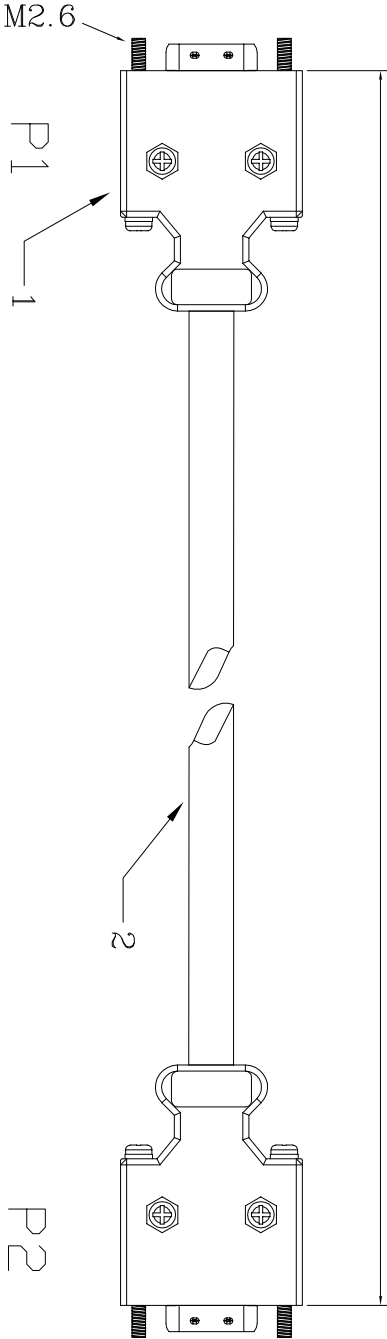

P2

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~11		4~11
12		12
13		13
14		14
Shell		Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN. DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

B

2	CABLE	UL2919 26AWG*7P+AEB PVC JACKET COLOR:BLACK OD= 7.0mm	1PCS
---	-------	---	------

A

		QUALITY SYMBOLS		UNIT		SCALE		TOLERANCES		ITEM		PART NAME		DESCRIPTION		PART NO.		SC14MM01-XXM		SHT		1/1	
		■: CRITICAL		⊙: MAJOR		mm		±0.10		1		CONNECTOR		SCSI 14P male solder ASS'Y TYPE									
		▽: ZERO DEFECT		▽: S.P.C																			
		A		图面发行		2022-06-02																	
		REV		DESCRIPTION		DATE																	

8

7

6

5

4

3

2

1

KinKuo 东莞市箐国电子有限公司
www.kinkuo.com