



REV.	DESCRIPTION	DATE
△		
△		

Rohs

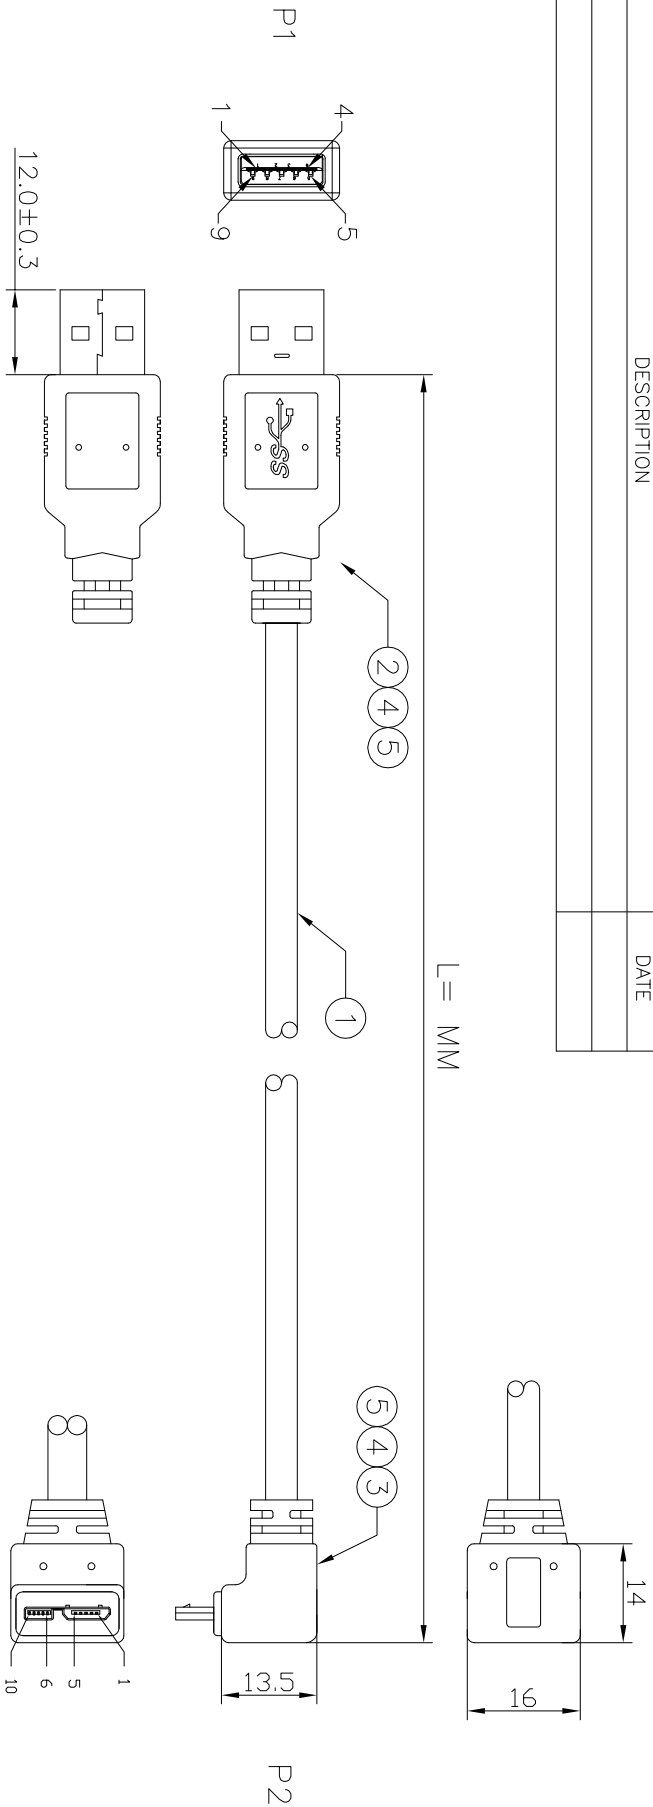

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

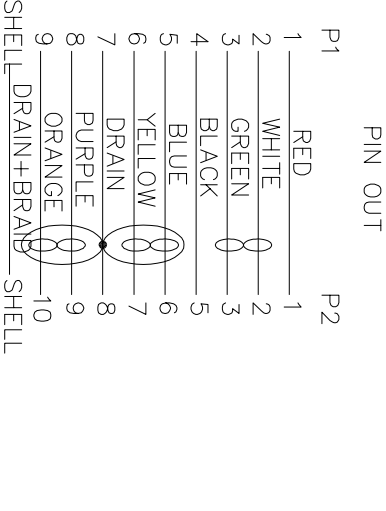

5	PVC 50P BLACK	12G		东莞市箐国电子有限公司 UNLESS OTHERWISE SPECIFIED TOLERANCE: x.xx ± .1 ; angles ± .1 ; DRAWN: ; CHECKED: ; APPROVED: ; DESCRIPTION: USB3.0 AM to Micro BM R/A Type Cable P/N: LKU30AMML00-X PRODUCT NO.: DWG NO: 20180125-01 SCALE: NONE SHEET: 1 of 1			
4	PE	6G					
3	USB(3.0) MICRO B TYPE Male Connector	1PCS					
2	USB(3.0) A TYPE Male Connector	1PCS					
1	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+AEB(AL) OD:5.5MM BLACK L: 2000MM	1PCS					
NO.	MATERIAL	DESCRIP TION	Q'TY	VENDOR			