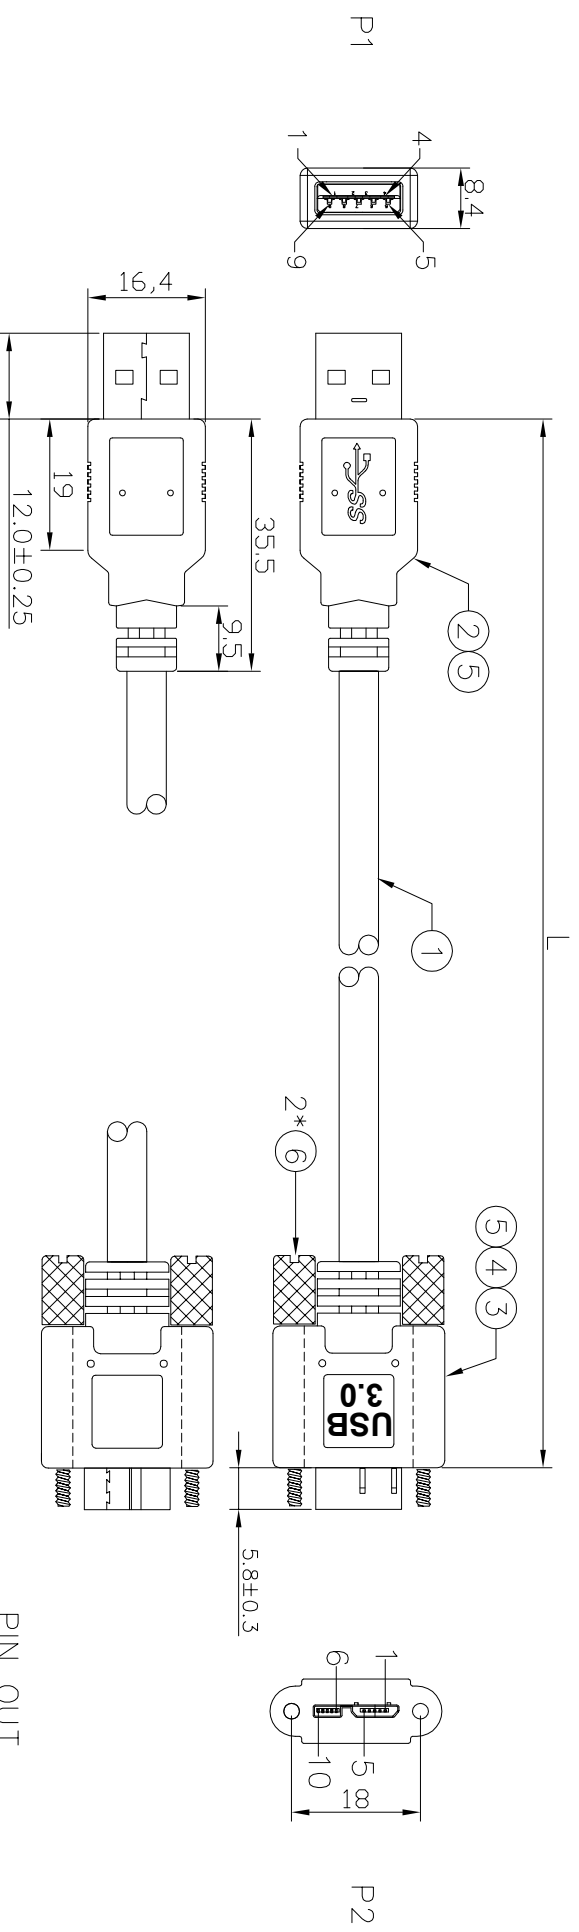


[illegible]

P1	PIN OUT	P2

1 _____ 1 (RED)
2 _____ 2 (WHITE)
3 _____ 3 (GREEN)
4 _____ 4 (BLACK)
5 _____ 5 (BLUE)
6 _____ 6 (YELLOW)
7 _____ 7 (DRAIN)
8 _____ 8 (PURPLE)
9 _____ 9 (ORANGE)
10 _____ 10 (ORANGE)
SHELL _____ SHELL (BRAID)

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 2ohm Max;
3. INSULATION RESISTANCE 10M ohm Min;
4. HI-POT DC 300V;

6	Screw 5.6*34MM M2.6	2PCS		东莞市箐国电子有限公司 UNLESS OTHERWISE SPECIFIED TOLERANCE $x \pm x$; $x \times x$; angles ; DESCRIPTION: USB3.0 AM/MICRO BM With Screw					
5	PVC 50P BLACK/BLUE	30G							
4	PE	10G							
3	USB(3.0)MICRO B Type Male Connector G/F Black	1PCS							
2	USB(3.0) A TYPE Male Connector G/F Color Blue	1SET							
1	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+AEB(AL) OD:5.5MM BLACK	1PCS							
NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR	APPROVED:		REV: x/0	UNIT: mm	DATE:20.05.14
					CHECKED:	DWG NO: 20200514-28			SHEET:1 of 1
					DRAWN:	CUSTOMER P/N: LKU30AM-S00X			SCALE:NONE
						PRODUCT NO.:			