


文档密级：
商业秘密


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECK	APPROVE
X1		INITIAL RELEASE	06/08/2026	DEVIN ZHOU	ROOKE YE	STEVEN LIN

NOTE:


- HSF SHALL CONFORM TO THE STANDARD QE-Q-19-001 ENVIRONMENTAL HAZARDOUS SUBSTANCES MANGGEMENT, THIS PRODUCT DOES NOT CONTROL HALOGENS.
有害物质须符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准,本产品不管控卤素。
- 100% OPEN,SHORT&INTERMITANCE TEST.
100%开路,短路和瞬断测试。
- 耐压:300V DC 10ms。绝缘阻抗:10M ohms MIN @300V DC。导通阻抗:5 ohms MAX。
- ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE GEN5 INDUSTRIAL STANDARD.
电气特性遵循PCIE GEN5工业标准。
- THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA: $85\pm 15\%$ OHMS, CABLE ABSOLUTE AREA: $85\pm 10\%$ OHMS。
该产品满足下面阻抗特性:接触区域 $85\pm 15\%$ 欧姆:线材为 $85\pm 10\%$ 欧姆。
- DIMENSIONS MARKED"▼"SHALL BE CHECKED.
标注"▼"的尺寸必须重点检验。

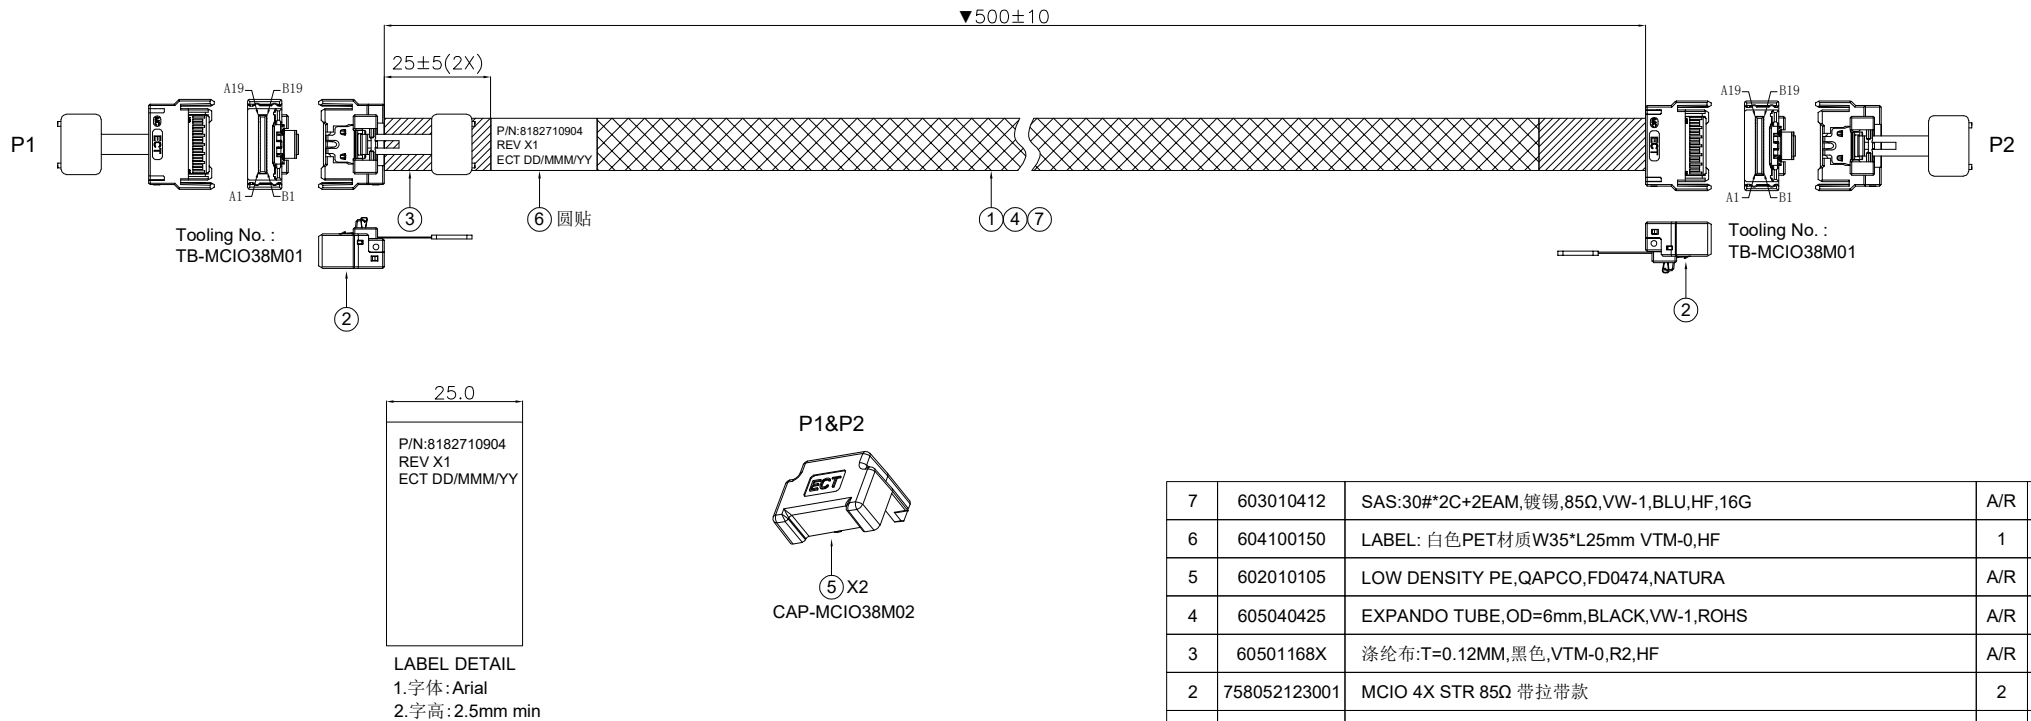

7	603010412	SAS:30#*2C+2EAM,镀锡,85Ω,VW-1,BLU,HF,16G	A/R	MM
6	604100150	LABEL: 白色PET材质W35*L25mm VTM-0,HF	1	PCS
5	602010105	LOW DENSITY PE,QAPCO,FD0474,NATURA	A/R	KG
4	605040425	EXPANDO TUBE,OD=6mm,BLACK,VW-1,ROHS	A/R	MM
3	60501168X	涤纶布:T=0.12MM,黑色,VTM-0,R2,HF	A/R	MM
2	758052123001	MCIO 4X STR 85Ω 带拉带款	2	PCS
1	603010582	SAS CBL:30#*2C+2EAM,镀银铜,85ΩV1,银,R2,HF,P5	A/R	MM
ITEM	P/N	DESCRIPTION	QTY	UNIT




LABEL DETAIL
1.字体:Arial
2.字高:2.5mm min



GENERAL TOLERANCE		SCALE:	DRAWN:	DATE:	DWG. NO:	TITLE:	REV.
XX. ± 5	XX. ° ± 2°	See Drawing	DEVIN ZHOU	06/08/2026	151-2710904-01	36_MCIO_4X_STR_TO_MCIO_4X_STR_P5,L=500MM	X1
X. ± 1	X. ° ± 1°	UNIT:	CHECK:	DATE:	PARTS NO. (INTENDED USE):		SHEET:
.X ± 0.5	.X° ± 0.5°	mm	APPROVE:	DATE:	8182710904		1/2
.XX ± 0.25		SIZE: A4					

文档密级：
商业秘密

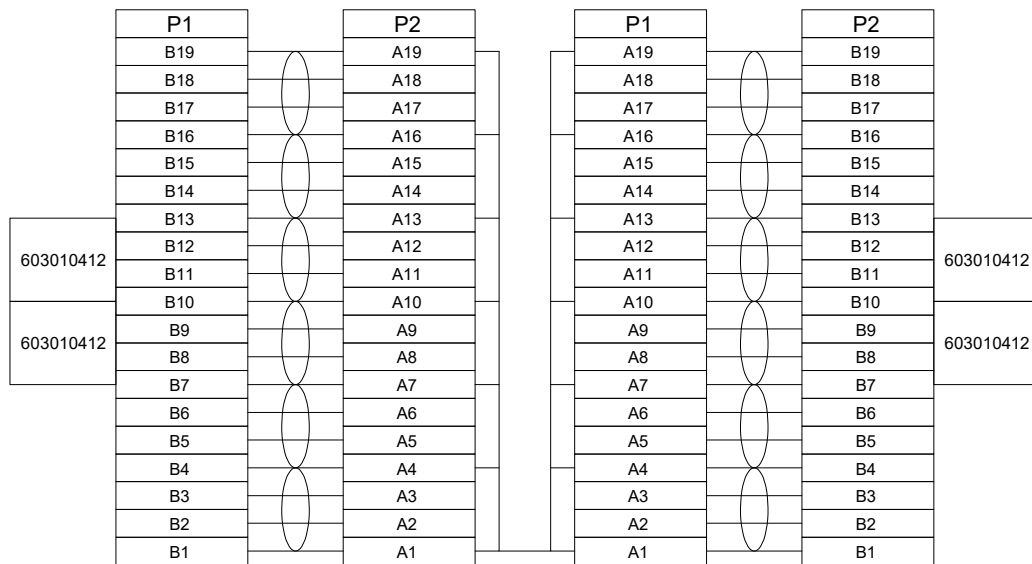

GENERAL TOLERANCE	
XX. ± 5	XX. $^{\circ} \pm 2^{\circ}$
X. ± 1	X. $^{\circ} \pm 1^{\circ}$
.X ± 0.5	.X $^{\circ} \pm 0.5^{\circ}$
.XX ± 0.25	

SCALE:	See Drawing
UNIT:	mm
SIZE:	A4

DRAWN:	DEVIN ZHOU
CHECK:	
APPROVE:	

DATE:	06/08/2026
DATE:	
DATE:	

DWG. NO:	151-2710904-01
PARTS NO. (INTENDED USE):	8182710904

TITLE:	36_MCIO_4X_STR_TO_MCIO_4X_STR_P5,L=500MM
--------	--

REV.	X1
SHEET:	2/2