

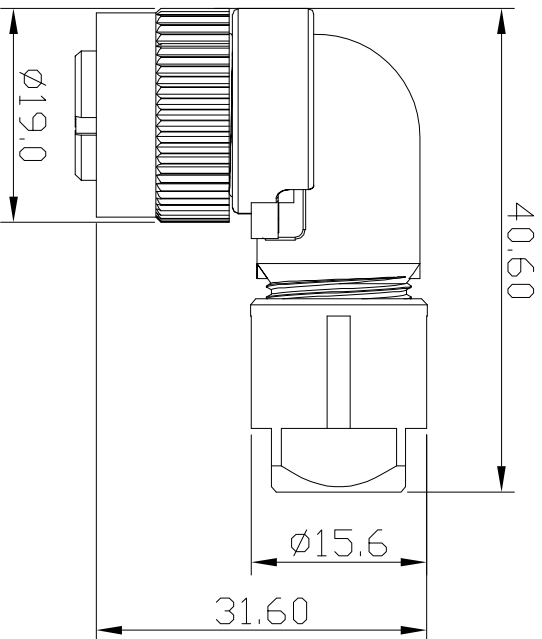


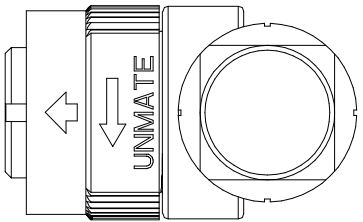

- NOTES:
1. PROTECTION LEVEL: IP67
 2. RATED CURRENT: 4 AMP
 3. RATED VOLTAGE: 250 V
 4. PLUG AND PULL TEST: 500 TIMES MIN..
 5. OPERATING TEMPERATURE: -40°C ~ +85°C
 6. CONTACT RESISTANCE: $\leq 3m\Omega$
 7. Connector plug-in conforms to IEC 61076-2-101
 8. All materials meet environmental requirements.
 9. CABLE CLAMP: ID6.0 ~ 8.0mm.

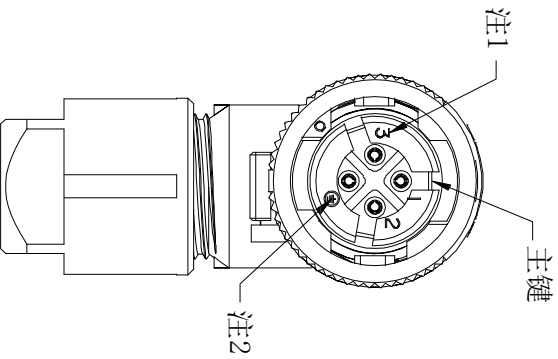

10	BACK NUT	PA		
9	CABLE CLAMP	PA		
8	A SEAL	NBR		
7	BACK SHELL	PA		
6	SCREW	Stainless steel		
5	Seal ring	NBR		
4	CONNECTING NUT	PA		
3	HOOD	PA		
2	TERMINAL	COPPER ALLOY	Au/G/F	
1	HOUSING	PA		
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

NAME: JAE-04P (FANUC) 伺服连接器		PART NO. JAE-04P-RA-HS01	
REV: A	UNIT: mm	DRW BY: Hungmei	CHK BY: Jack Chen
SCALE: N:1	DATE: 2018/03/11	APP BY: JAE-04P	

Tolerance		QUALITY SYMBOLS	
X.	± 0.60	☐ :	CRITICAL
x	± 0.40	☒ :	MAJOR
.xx	± 0.25	☐ :	ZERO DEFECT S.P.C

A	2018/03/11	NEW ISSUE	Jack Chen
△	DATE	DESCRIPTION	APPROVER