

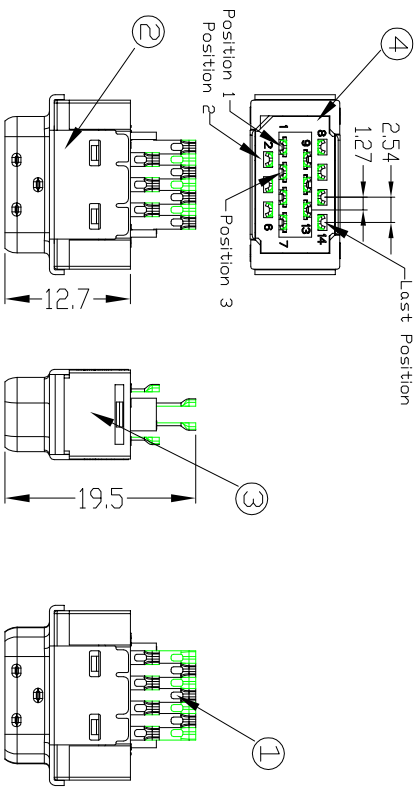


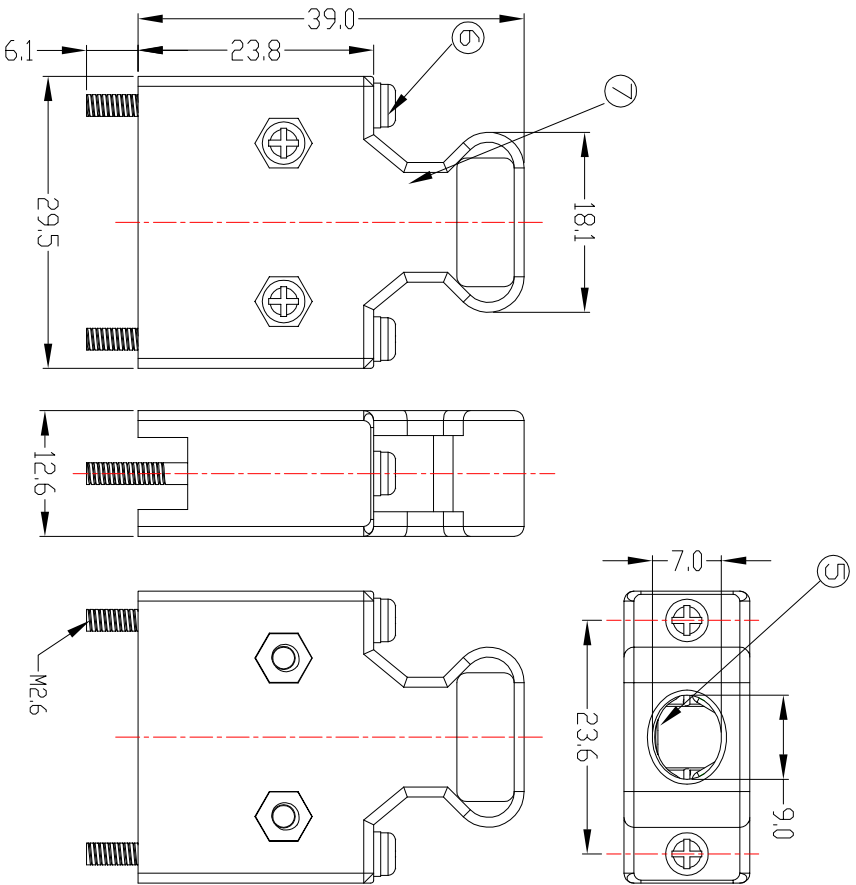

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C ~ +105°C

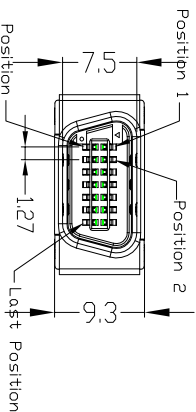

7	HOOD	PBT+30%GF	COLOR:BLACK	
6	SCERW	STEEL	PLATING:NI	l=33.0mm
5	CLAMP	STEEL	PLATING:MATTE TIN AND NI	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:NI	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: G/F UNDER-PLATING: NI	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS		Tolerance		NAME: 3M同等品 SCS1 14P MALE SOLDER ASSEMBLY (客户用图)		PART NO. B01-01431134-01		DRAWING NO. B01-011	
△		□:	⊗:	X.	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY
△		CRITICAL	MAJOR	X	SCALE: N:1	DATE: 2009/06/04	DAW NHU	KING ZHOU	
△	2009/06/04新版发行			.xx					
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	东莞市箐国电子有限公司				
8	7	6	5	4	3	2	1		