

• ELECTRICAL CHARACTERISTICS


Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500M Ω /Min

Contact Resistance: 35m Ω /Max

Operation Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

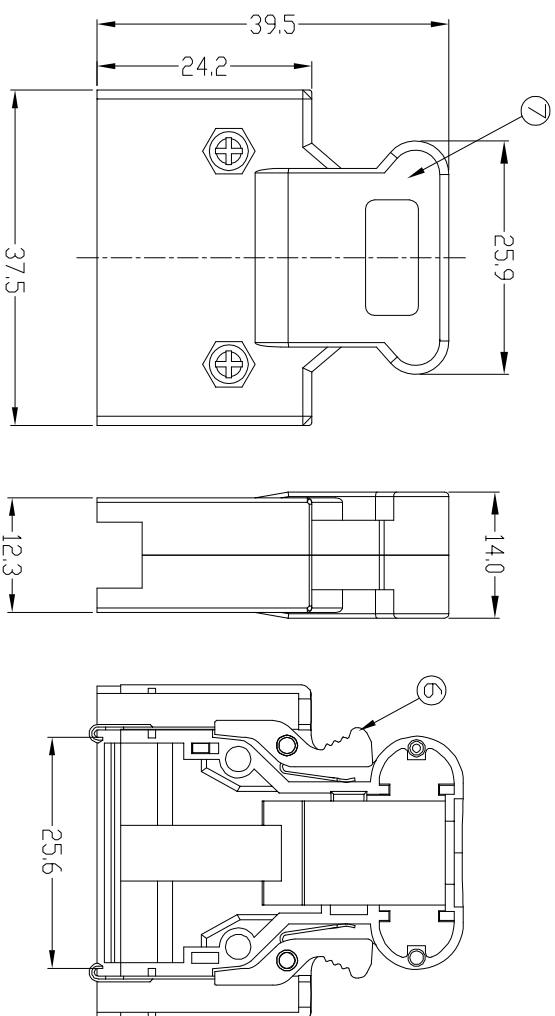

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
7	HOOD	PBT+30%GF	COLOR:BLACK	
6	LATCH	ABS,SUS 304	COLOR:BLACK	
5	CLAMP	STEEL	PLATING:MATTE TIN AND NI	
4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:NI	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:AU 3u" SOLDER AREA:G/F UNDER-PLATING:NI	

QUALITY SYMBOLS

Tolerance

NAME:	3M同等品 SCST 26P MALE SOLDER ASSEMBLY TYPE弹片式端子全金 (客户用图)	PART NO.	B01-02631132-01
-------	---	----------	-----------------

□ □

□ □

 ± 0.80

REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.
--------	----------	--------	--------	--------	-------------

CRITICAL MAJOR

10.70
H0.30
.x

SCALE:	N:1	DATE:	2009/06/11	DAW NHU	KING ZHOU	
						B01-015

SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C
------	------	-------------	----------	-------------	-------

东莞市箐国电子有限公司