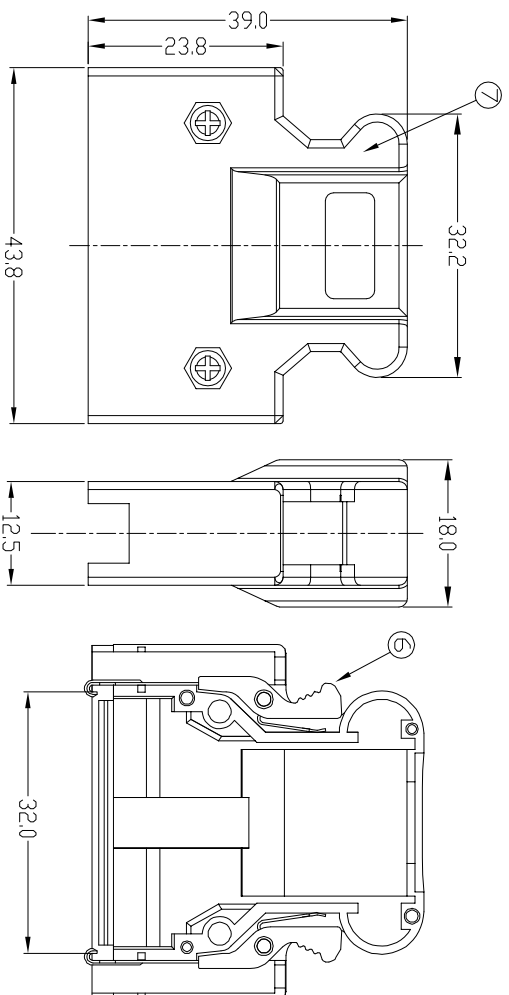
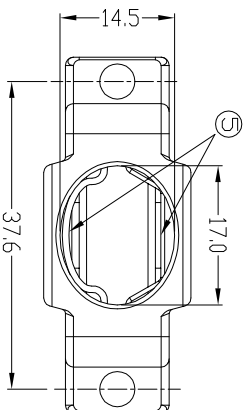


ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500M Ω /Min
 Contact Resistance: 35m Ω /Max
 Operation Temperature: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C

7	HOOD	PBT+30%GF	COLOR: BLACK	
6	LATCH	ABS,SUS304	COLOR: BLACK	
5	CLAMP	PBT+30%GF	PLATING: MATTE TIN AND NI	
4	COVER	PBT+30%GF	COLOR: BLACK	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: NI	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: G/F UNDER-PLATING: NI	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

						QUALITY SYMBOLS		Tolerance		NAME:		3M同等品 SCST 36P MALE SOLDER ASSEMBLY TYPE弹片式端子全金		PART NO.		B01-0363132-01	
△							□ :		X.	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△							☒ :		±0.80								
							CRITICAL		±0.50								
△	2009/06/11	新版发行					MAJOR		±0.30	SCALE:	N:1	DATE:	2009/06/11	JING LI	KING ZHOU		B01-016
							▽ :										
							ZERO DEFECT										
SIDE	DATE		DESCRIPTION		APPROVER		S.P.C				东莞市箐国电子有限公司						

东莞市箐国电子有限公司