
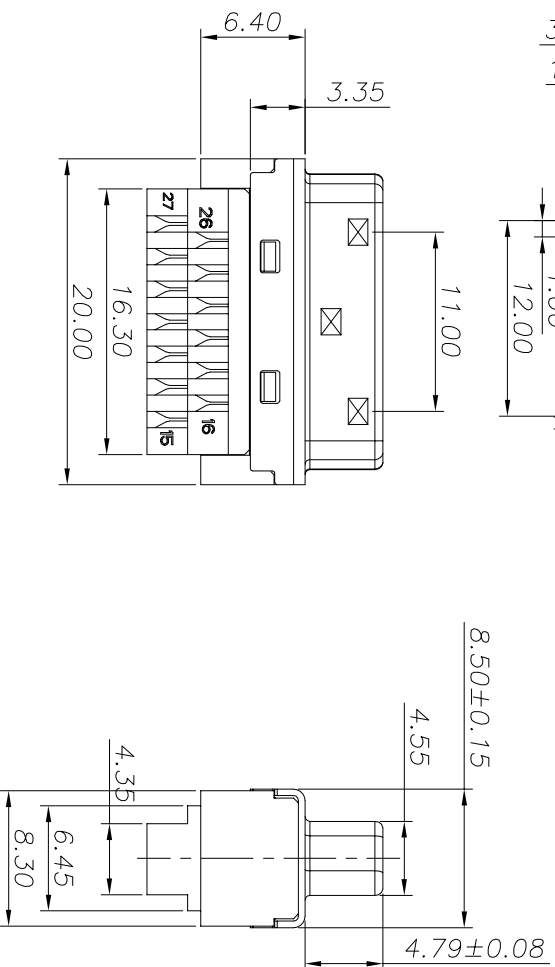
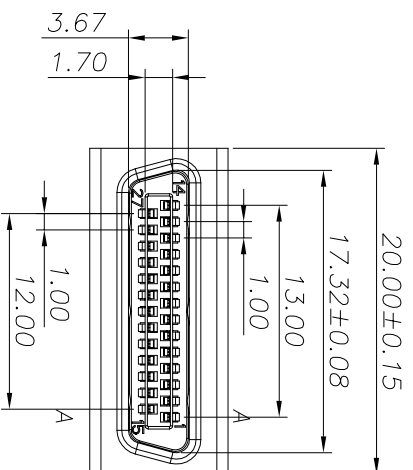


3D VIEW

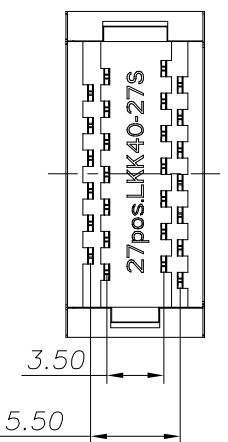

|       |                    |                  |             |                                                                       |
|-------|--------------------|------------------|-------------|-----------------------------------------------------------------------|
| D     | SHELL              | 1 PCS            | SPCC TO.40  | NICKEL 60u"MIN                                                        |
| C     | TERMINAL           | 27PCS            | C5191 TO.25 | GOLD FLASH AU/SPLATING ON CONTACT AREA,<br>1IN PLATING ON SOLDER AREA |
| B     | COVER 1            | 1 PCS            | LCP UL94-V0 | BLACK                                                                 |
| A     | HOUSING            | 1 PCS            | LCP UL94-V0 | BLACK                                                                 |
| NO.   | DESCRIPTION        | Q,TY             | MATERIAL    | PLATING & COLOR                                                       |
| NAME: | DH 27P Male Solder | Type Pitch=1.0mm | PART NO.    | B01-DH40-27S                                                          |

|        |     |       |            |          |        |        |                         |
|--------|-----|-------|------------|----------|--------|--------|-------------------------|
| REV:   | A   | UNIT: | mm         | DRW BY   | CHK BY | APP BY | DRAWING NO.<br>DH40-27S |
| SCALE: | N:1 | DATE: | 2022/11/08 | Huangmei | Jack   | Chen   |                         |

SPECIFICATION:

1. RATED CURRENT: 0.30A/CONTACT
2. INSULATION RESISTANCE: 500MOHM MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
4. OPERATING TEMPERATURE: -25°C TO +85°C
5. ROHS COMPLIANT.

[illegible]