


8		7		6		5		4		3		2		1																																																																																																																																																			
F																																																																																																																																																																	
NOTES: • ELECTRICAL CHARACTERISTICS Contact Current Rating: 1 Amp Dielectric Withstanding Voltage: 500V AC Insulation Resistance: 500MΩ/Min Contact Resistance: 35mΩ/Max Operation Temperature: −45°C ~ +85°C																																																																																																																																																																	
E																																																																																																																																																																	
D																																																																																																																																																																	
C																																																																																																																																																																	
B																																																																																																																																																																	
<table><tr><td>ITEM</td><td>DESC.</td><td colspan="4">MATERIAL</td><td colspan="4">REMARKS</td><td colspan="4">PART REMARKS</td></tr><tr><td>4</td><td>COVER</td><td colspan="4">PBT+30%G.F. (UL 94V-0)</td><td colspan="4">COLOR:BLACK</td><td colspan="4"></td></tr><tr><td>3</td><td>HOUSING</td><td colspan="4">PBT+30%G.F. (UL 94V-0)</td><td colspan="4">COLOR:BLACK</td><td colspan="4"></td></tr><tr><td>2</td><td>SHELL</td><td colspan="4">SPCC (t=0.50mm)</td><td colspan="4">Ni Plating</td><td colspan="4"></td></tr><tr><td>1</td><td>TERMINAL</td><td colspan="4">PHOSPHOR BRONZE(t=0.25mm)</td><td colspan="4">CONTACT AREA: Au G/F SOLDER AREA: Sn 100u” UNDER-PLATING: Ni 50u</td><td colspan="4"></td></tr></table>																ITEM	DESC.	MATERIAL				REMARKS				PART REMARKS				4	COVER	PBT+30%G.F. (UL 94V-0)				COLOR:BLACK								3	HOUSING	PBT+30%G.F. (UL 94V-0)				COLOR:BLACK								2	SHELL	SPCC (t=0.50mm)				Ni Plating								1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)				CONTACT AREA: Au G/F SOLDER AREA: Sn 100u” UNDER-PLATING: Ni 50u																																																																																			
ITEM	DESC.	MATERIAL				REMARKS				PART REMARKS																																																																																																																																																							
4	COVER	PBT+30%G.F. (UL 94V-0)				COLOR:BLACK																																																																																																																																																											
3	HOUSING	PBT+30%G.F. (UL 94V-0)				COLOR:BLACK																																																																																																																																																											
2	SHELL	SPCC (t=0.50mm)				Ni Plating																																																																																																																																																											
1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)				CONTACT AREA: Au G/F SOLDER AREA: Sn 100u” UNDER-PLATING: Ni 50u																																																																																																																																																											
A																																																																																																																																																																	
<table><tr><td colspan="2">QUALITY SYMBOLS</td><td colspan="14"></td></tr><tr><td colspan="2">□ :</td><td colspan="14">✕ :</td></tr><tr><td colspan="2">CRITICAL</td><td colspan="14">MAJOR</td></tr><tr><td colspan="2">▽ :</td><td colspan="14">▽ :</td></tr><tr><td colspan="2">ZERO DEFECT</td><td colspan="14">S.P.C</td></tr></table> <table><tr><td colspan="2">Tolerance</td><td colspan="14">NAME: SCS1 68P Male Solder Type for cable</td><td colspan="2">PART NO.</td><td colspan="2">B03-068311E0-01</td></tr><tr><td colspan="2">X. ⌀0.50</td><td colspan="2">REV: A</td><td colspan="2">UNIT: mm</td><td colspan="2">DRW BY</td><td colspan="2">CHK BY</td><td colspan="2">APP BY</td><td colspan="4">DRAWING NO.</td></tr><tr><td colspan="2">.x ⌀0.30</td><td colspan="2">SCALE: N:1</td><td colspan="2">DATE: 2020/01/14</td><td colspan="2">DAWN HU</td><td colspan="2">KING ZHOU</td><td colspan="4">TAT-C068</td></tr><tr><td colspan="2">.xx ±0.25</td><td colspan="14"></td></tr></table> 东莞市箐国电子有限公司																QUALITY SYMBOLS																□ :		✕ :														CRITICAL		MAJOR														▽ :		▽ :														ZERO DEFECT		S.P.C														Tolerance		NAME: SCS1 68P Male Solder Type for cable														PART NO.		B03-068311E0-01		X. ⌀0.50		REV: A		UNIT: mm		DRW BY		CHK BY		APP BY		DRAWING NO.				.x ⌀0.30		SCALE: N:1		DATE: 2020/01/14		DAWN HU		KING ZHOU		TAT-C068				.xx ±0.25															
QUALITY SYMBOLS																																																																																																																																																																	
□ :		✕ :																																																																																																																																																															
CRITICAL		MAJOR																																																																																																																																																															
▽ :		▽ :																																																																																																																																																															
ZERO DEFECT		S.P.C																																																																																																																																																															
Tolerance		NAME: SCS1 68P Male Solder Type for cable														PART NO.		B03-068311E0-01																																																																																																																																															
X. ⌀0.50		REV: A		UNIT: mm		DRW BY		CHK BY		APP BY		DRAWING NO.																																																																																																																																																					
.x ⌀0.30		SCALE: N:1		DATE: 2020/01/14		DAWN HU		KING ZHOU		TAT-C068																																																																																																																																																							
.xx ±0.25																																																																																																																																																																	
SIDE		DATE		DESCRIPTION		APPROVER		5		4		3		2		1																																																																																																																																																	
8		7		6		5		4		3		2		1																																																																																																																																																			

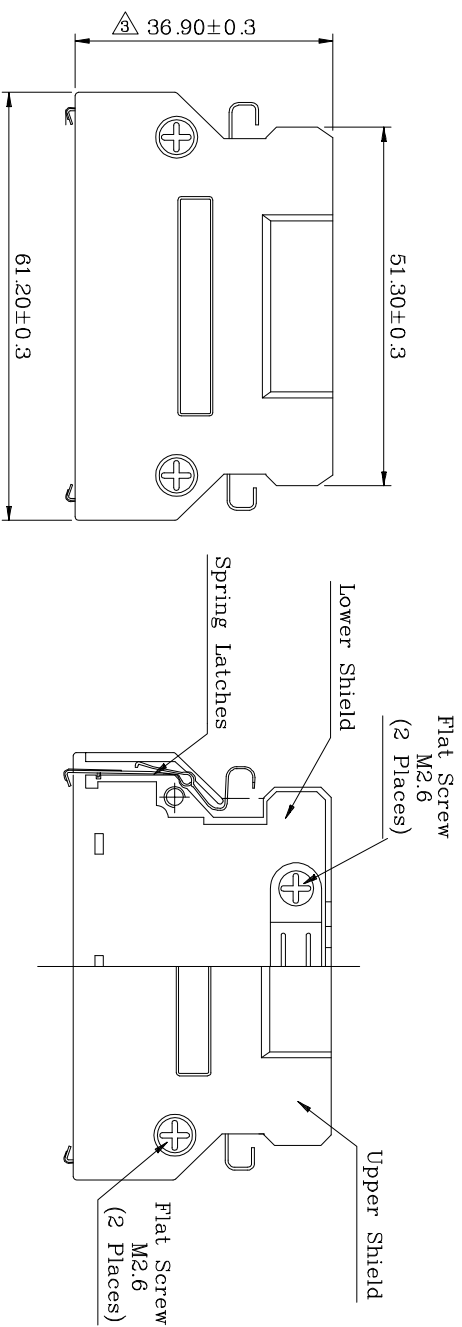


- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

PART NO:




BXX-068NN8N3-XX

SPECIFICATION:
02:HPDB
03:HPCN

ENTRY HOLE SIZES:

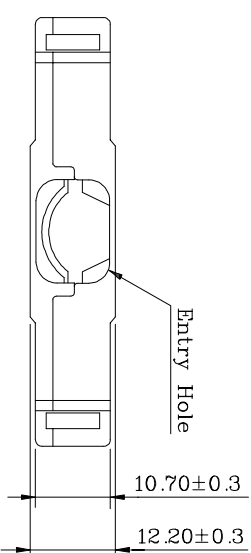

1A:ø10.0
1D:ø14.0
2D:24mm方型孔 2*4

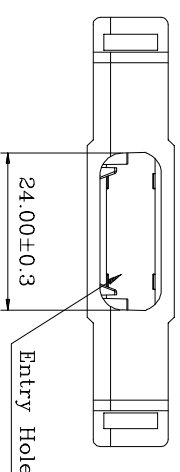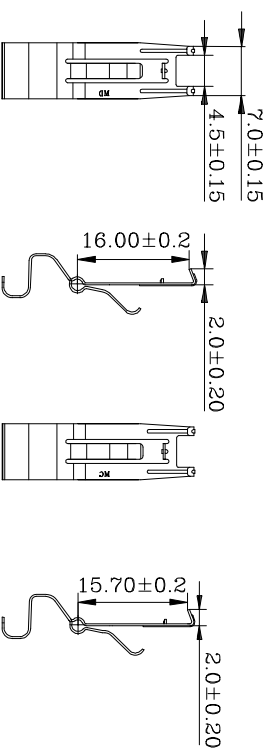

《 HPDB 》		《 HPCN 》	
4	SPRING LATCH	STAINLESS STEEL	
3	CABLE CLIPPER	STEEL	PLATING:NI
2	FLAT SCREWS	STEEL	PLATING:NI
1	BACK SHELL	ZINC ALLOY	PLATING:NI
ITEM	DESC.	MATERIAL	REMARKS
			PART REMARKS

			QUALITY SYMBOLS		Tolerance		NAME:		SCS 68P Male ZINC Hood Latch Type		PART NO.	BXX-068NN8N3-XX		
			☐ :	☒ :	x.	±0.50	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
					.x	±0.30	SCALE:	N:1		DATE:	2012/07/22	JINGLI	KING ZHOU	BXX-A09
△	2012/07/22	NEW ISSUE		JINGLI	.xx	±0.25	东莞市箐国电子有限公司							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C									

东莞市箐国电子有限公司