
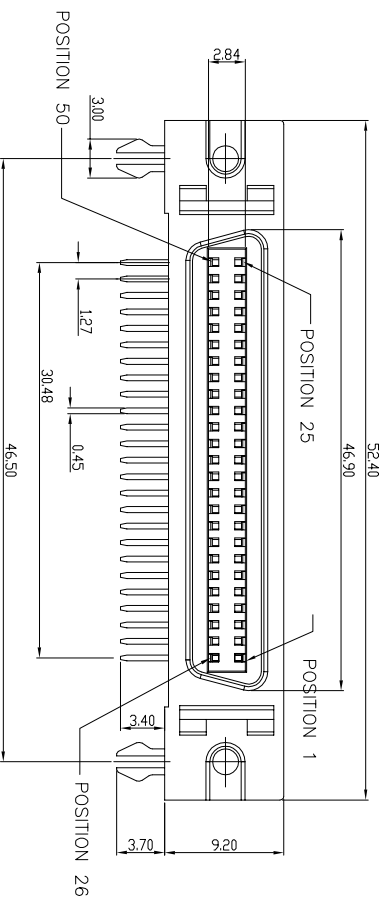
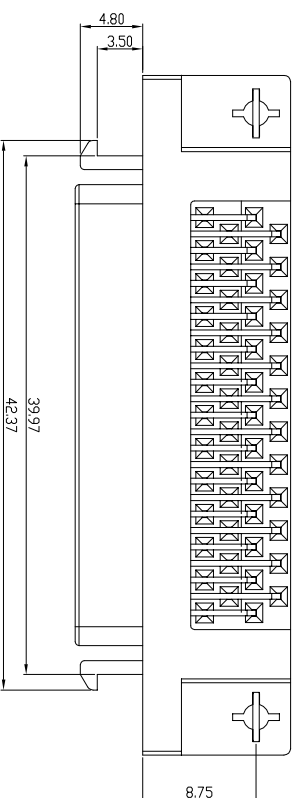


1. ELECTRICAL CHARACTERISTICS;
 - 1.1 CONTACT RATING:30 VAC
 - 1.2 CONTACT CURRENT RATING:0.5A
 - 1.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 60S.
 - 1.4 INSULATION RESISTANCE 500mΩ MIN INITIAL
 - 1.5 OPERATING TEMPERATURE:—45°C ~ 85°C
2. PLATING
 - 2.1 TERMINAL:50u” MIN NICKEL ALL OVER
80u” MIN Tin ON SOLDER AREA
1u” GOLD ON CONTACT AREA
 - 2.2 SHELL:100u”MIN.NICKEL OVER 50”MIN COPPER

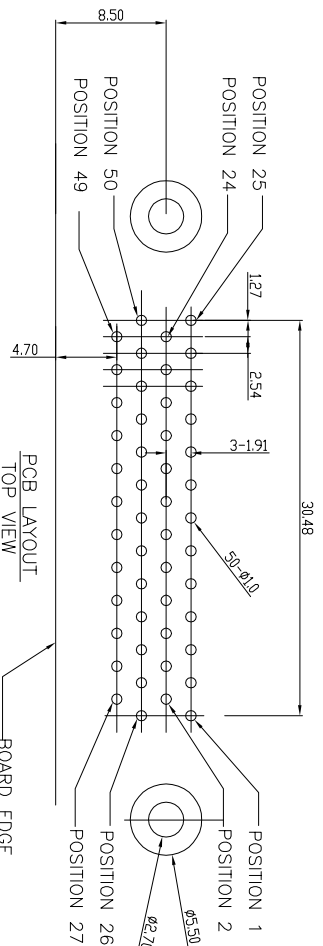

4	SHELL	ZINC ALLOY Ni Plated	1	pcs
3	CONTACT	COPPER ALLOY(T=0.30mm)	50	pcs
2	COVER	LCP BLACK UL94-V0	1	pcs
1	INSULATOR	PBT BLACK UL 94V-0	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

PART NAME:	SCSI MDR-50Pin Female Connector R/A For PCB	PART NO:	B03-050618A7-01
------------	---	----------	-----------------

Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	SCALE:	N:1	DATE:	2023/03/11	Huangmei	Jack	Chen	
x. ±0.60								B03-050

 $\times$ ± 0.40  $\times x$ ± 0.25	 东莞市箐国电子有限公司 www.KinKuo.com
--	--

8						
7						
6						
5						
4						
3						
2						
1						