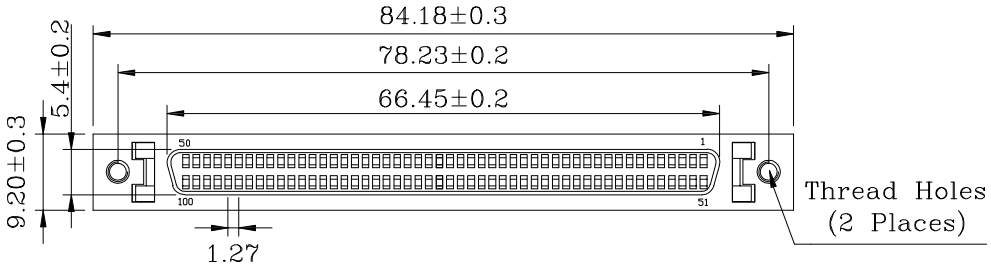

- Current Rating: 0.5 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: −25°C ~ +85°C

PART NO: B02−100811EC−2 X

BRACKET FINISHES:

L: LATCH BRACKET
S: SCREW BRACKET

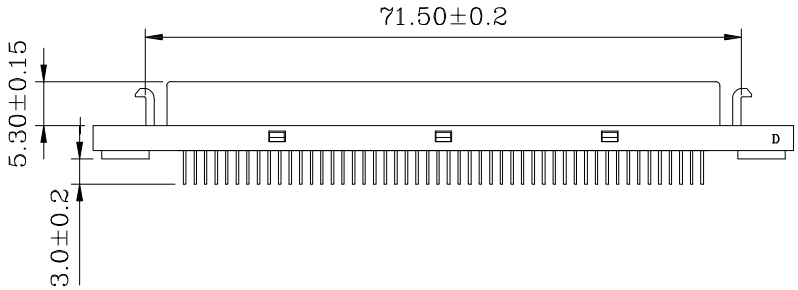



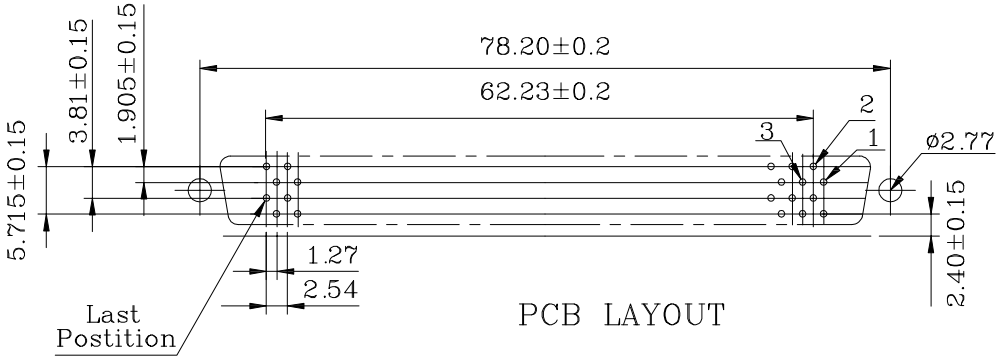

PCB LAYOUT

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	

SIDE	DATE	DESCRIPTION	APPROVER
A	2011/10/19	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Toleance	
x.	±0.50
.x	±0.30
.xx	±0.25

NAME:	SCSI-II 100P Female V/T Type For PCB				PART NO.	B02−100811EC−2X	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2011/10/19	JINGLI	KING ZHOU		B02−036

东莞市箐国电子有限公司