

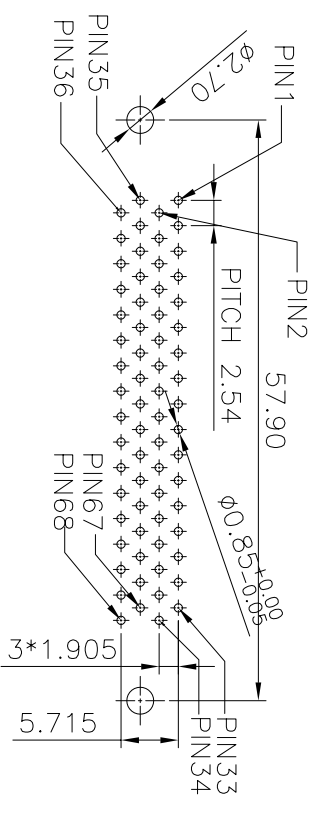


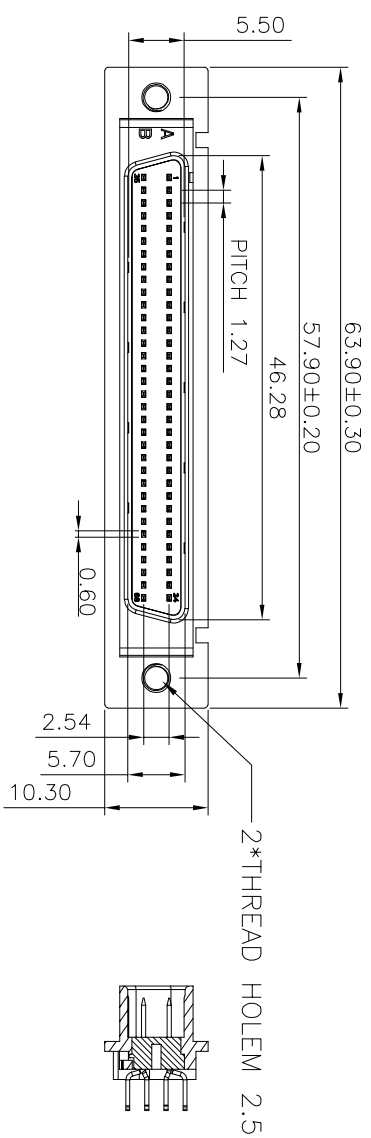

PCB LAYOUT

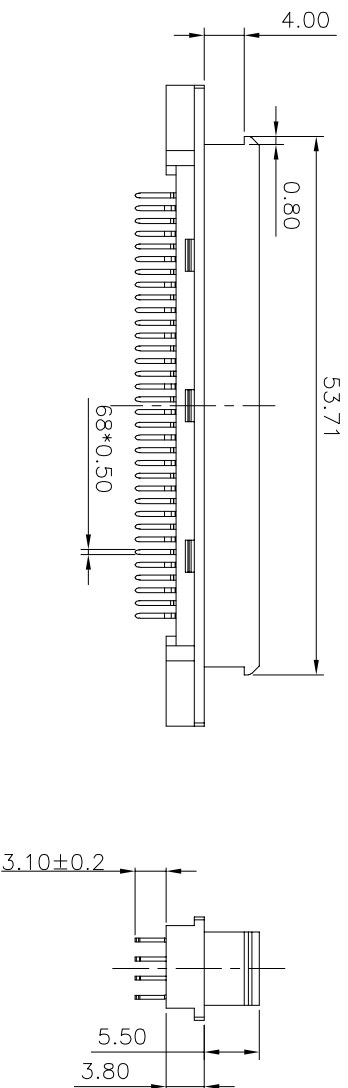

SPECIFICATIONS

Voltage Rating: 15V MAX.

Current Rating: 1.2A MAX. /contact

Withstand Voltage: AC 500V

Contact Resistance: Initial: 50 mΩ Max,

Final: 100 mΩ Max.

Insulation Resistance: 500M Ω Min

Operation Temperatur: -40°C to $+85^{\circ}\text{C}$

4	SHELL	ZINC ALLOY NICKEL PLATED	1	pcs
3	TERMINAL	COPPER ALLOY T=0.4, GOLD FLASH PLATING ON CONTACT AREA	68	pcs
2	COVER	PBT UL 94V-0 BLACK	1	pcs
1	HOUSING	PBT UL 94V-0 BLACK	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

PART NAME:		SCSI-DB 68Pin Male Connector V/T Type For PCB				PART NO.:		PCS-E68MD+	
Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	SCALE:	N:1	DATE:	2024/03/11	Huangmei	Juok	Chen	PCS-E68	
x.	±0.60								

	
± 0.40	.X
± 0.25	.XX



东莞市箐田电子有限公司

www.kinkuo.com

A	A	2024/03/11	NEW ISSUE
	REV	DATE	DESCRIPTION
			APPROVER
			Jack Chen

QUALITY SYMBOLS	
☐ :	☒ :
CRITICAL	MAJOR
☐ :	☒ :
ZERO DEFECT	S.P.C

8	7	6
---	---	---

5

4	
---	--

3	
---	--

--	--

2	
---	--