

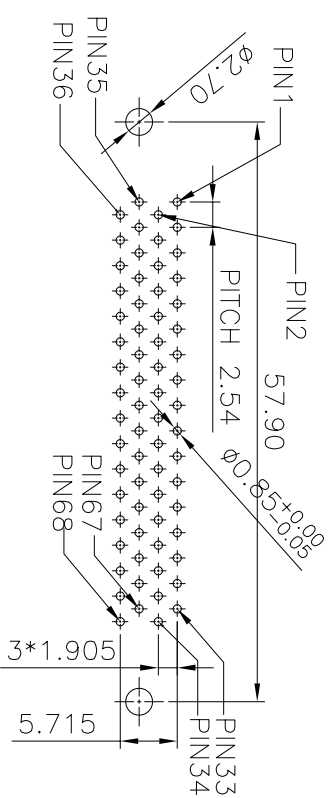

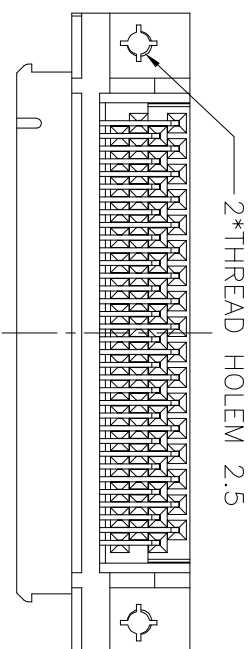






PCB LAYOUT

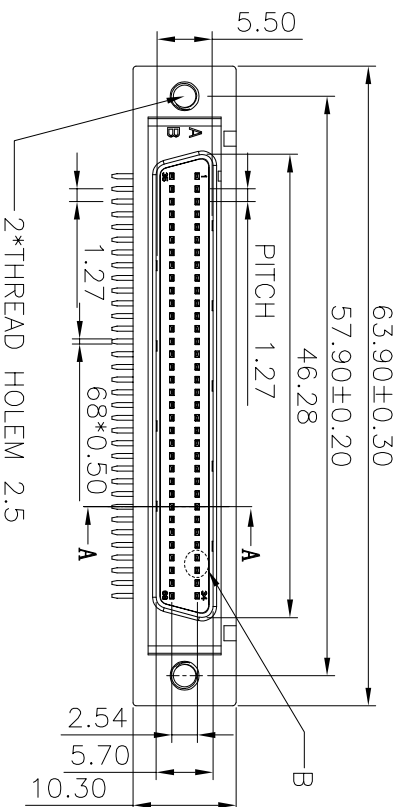

SECTION A-A

SPECIFICATIONS

Voltage Rating: 15V MAX.
Current Rating: 1.2A MAX. /contact
Withstand Voltage: AC 500V
Contact Resistance: Initial: 50 mΩ Max,
Final: 100 mΩ Max.
Insulation Resistance: 500MΩ Min
Operation Temperature: -40°C to +85°C

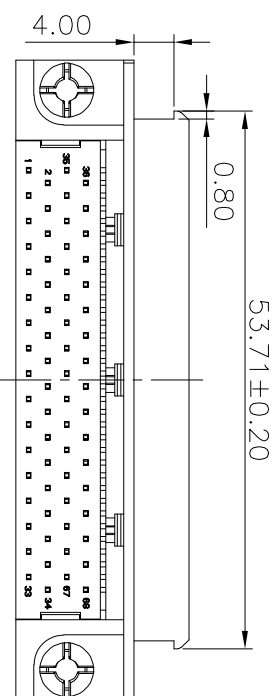

4	SHELL	ZINC ALLOY NICKEL PLATED	1	pcs
3	TERMINAL	COPPER ALLOY T=0.40,GOLD FLASH PLATING ON CONTACT AREA	68	pcs
2	COVER	PBT UL 94V-0 BLACK	1	pcs
1	HOUSING	PBT UL 94V-0 BLACK	1	pcs
NO.	PART NAME	DESCRIPTION	QTY	UNIT

PART NAME:		SCSI 68Pin Male Right Angle Type Connector				PART NO:		5174225-5	
Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	SCALE:	N:1	DATE:	2024/03/11	Huangmei	Jack Chen		5174225	
x. ±0.60									

				CRITICAL	MAJOR
A	2024/03/11	NEW ISSUE	Jack Chen	√:	√:
REV	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C.



东莞市箐国电子有限公司
www.kinkuo.com

www.kinku.com