


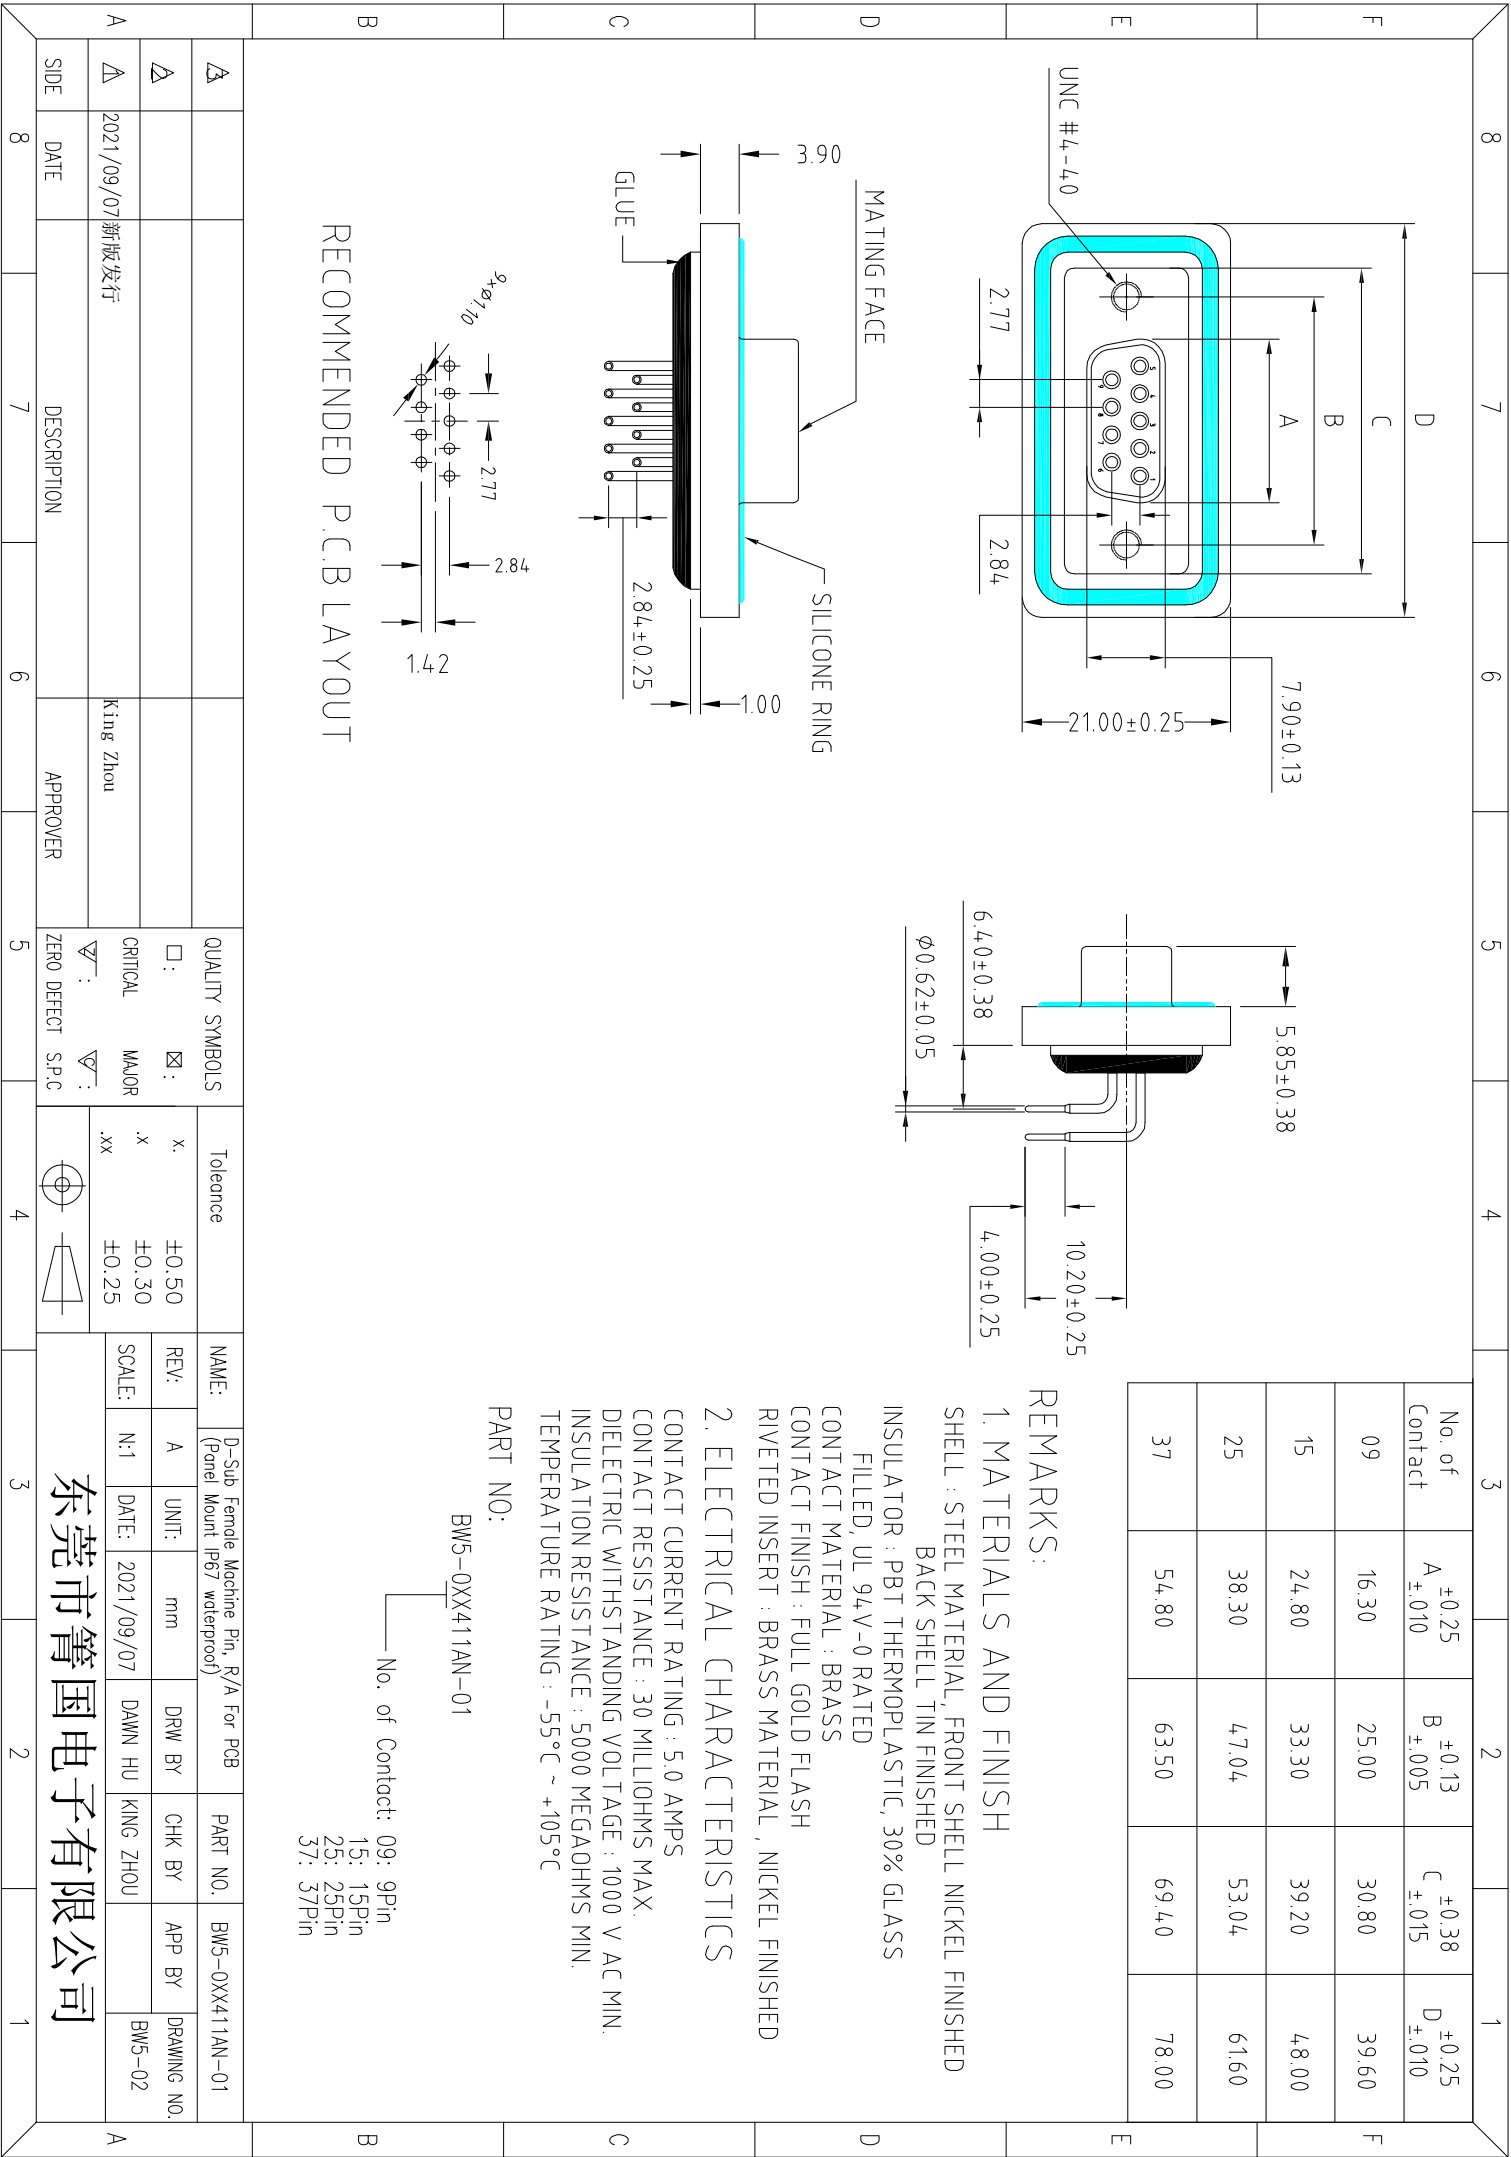

3			2		1	
No. of Contact	A _{±0.25} A _{±.010}	B _{±0.13} B _{±.005}	C _{±0.38} C _{±.015}	D _{±0.25} D _{±.010}		
09	16.30	25.00	30.80	39.60		
15	24.80	33.30	39.20	48.00		
25	38.30	47.04	53.04	61.60		
37	54.80	63.50	69.40	78.00		

REMARKS:

1. MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILED, UL 94V-0 RATED
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH
RIVETED INSERT : BRASS MATERIAL, NICKEL FINISHED

2. ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C

PART NO:

BW5-0XX411AN-01

No. of Contact: 09: 9Pin

15: 15Pin

25: 25Pin

37: 37Pin

RECOMMENDED P.C.B LAYOUT

A				QUALITY SYMBOLS		Tolerance		NAME: D-Sub Female Machine Pin, R/A For PCB (Panel Mount IP67 waterproof)		PART NO.		BW5-0XX411AN-01					
A				□: ☒:		X. ±0.50		REV: A UNIT: mm		DRW BY		CHK BY		APP BY		DRAWING NO.	
A		2021/09/07 新版发行		CRITICAL MAJOR		.X ±0.30		SCALE: N:1 DATE: 2021/09/07		DAWN HU		KING ZHOU				BW5-02	
SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT S.P.C									
8		7		6		5		4		3		2		1			

东莞市箐国电子有限公司