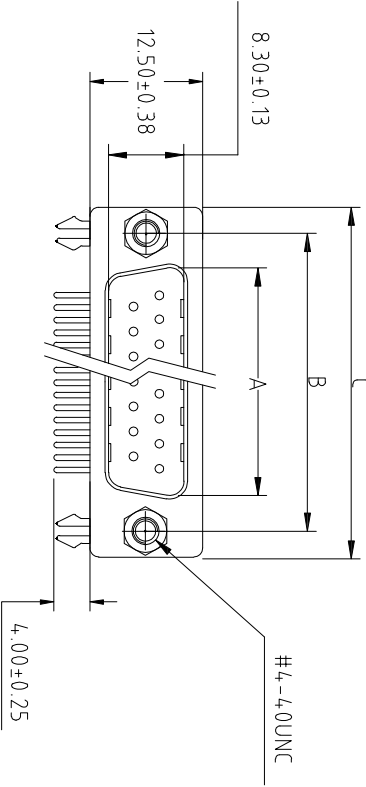
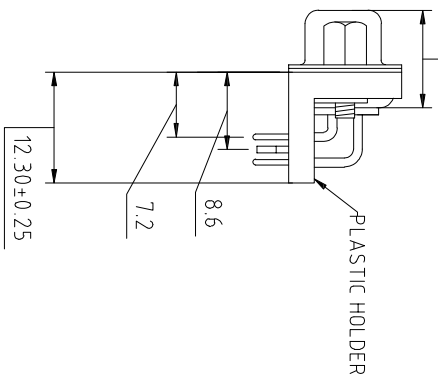
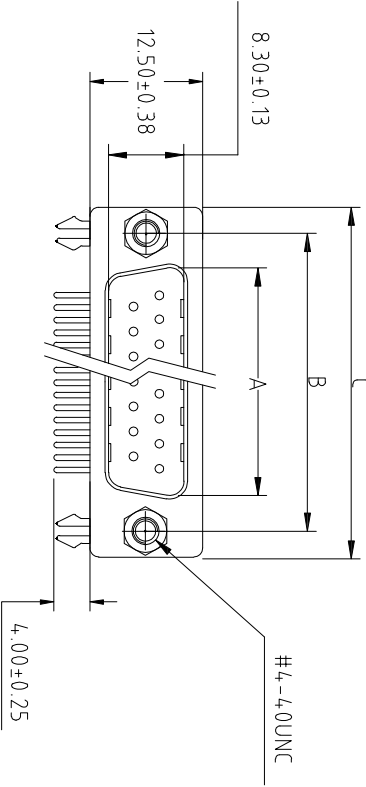
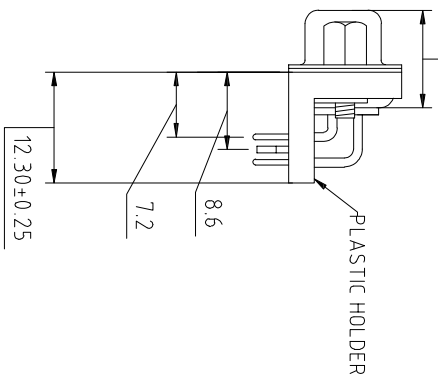
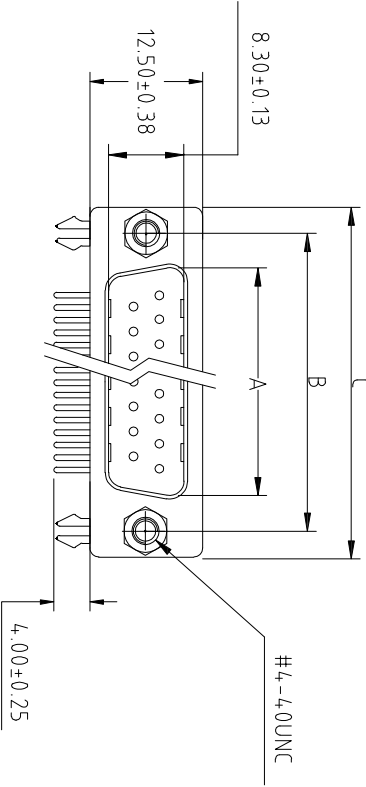
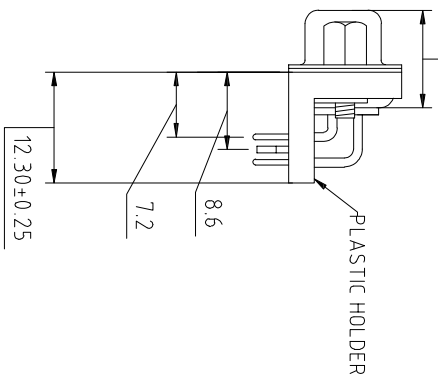
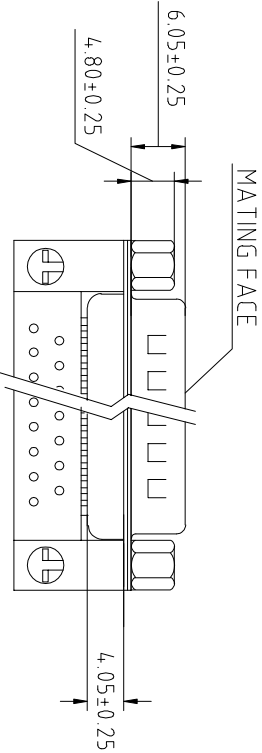
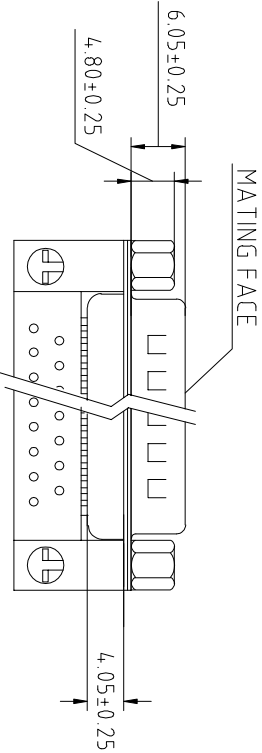
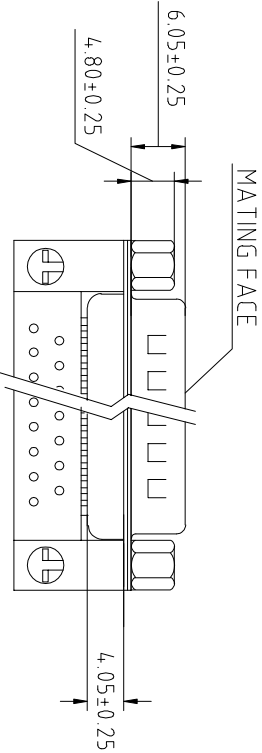
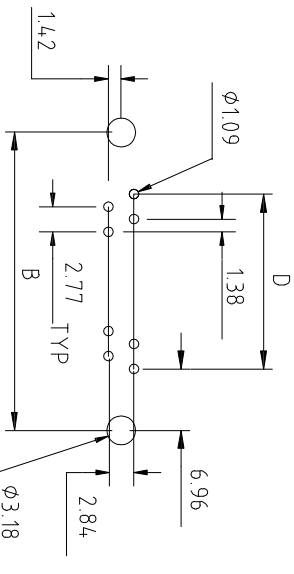
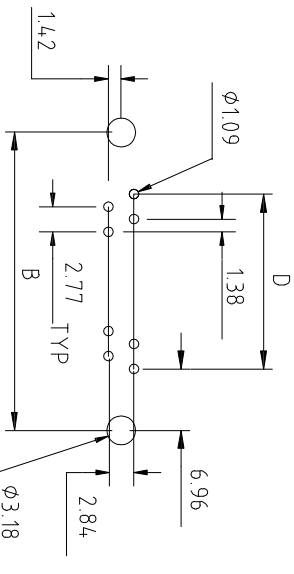
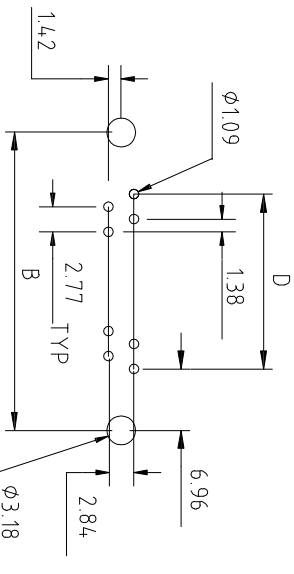


8		7		6		5		4		3		2		1																																																												
<table><tr><td colspan="2">F</td><td colspan="2">No. of Contact</td><td colspan="2">$A_{\pm 0.25} \pm 0.10$</td><td colspan="2">$B_{\pm 0.13} \pm 0.05$</td><td colspan="2">$C_{\pm 0.38} \pm 0.15$</td><td colspan="2">$D_{\pm 0.25} \pm 0.10$</td></tr><tr><td colspan="2"></td><td colspan="2">09</td><td colspan="2">16.90</td><td colspan="2">25.00</td><td colspan="2">30.80</td><td colspan="2">11.08</td></tr><tr><td colspan="2"></td><td colspan="2">15</td><td colspan="2">25.35</td><td colspan="2">33.30</td><td colspan="2">39.20</td><td colspan="2">19.39</td></tr><tr><td colspan="2"></td><td colspan="2">25</td><td colspan="2">39.00</td><td colspan="2">47.04</td><td colspan="2">53.04</td><td colspan="2">33.24</td></tr><tr><td colspan="2"></td><td colspan="2">37</td><td colspan="2">55.42</td><td colspan="2">63.50</td><td colspan="2">69.40</td><td colspan="2">49.86</td></tr></table>															F		No. of Contact		$A_{\pm 0.25} \pm 0.10$		$B_{\pm 0.13} \pm 0.05$		$C_{\pm 0.38} \pm 0.15$		$D_{\pm 0.25} \pm 0.10$				09		16.90		25.00		30.80		11.08				15		25.35		33.30		39.20		19.39				25		39.00		47.04		53.04		33.24				37		55.42		63.50		69.40		49.86	
F		No. of Contact		$A_{\pm 0.25} \pm 0.10$		$B_{\pm 0.13} \pm 0.05$		$C_{\pm 0.38} \pm 0.15$		$D_{\pm 0.25} \pm 0.10$																																																																
		09		16.90		25.00		30.80		11.08																																																																
		15		25.35		33.30		39.20		19.39																																																																
		25		39.00		47.04		53.04		33.24																																																																
		37		55.42		63.50		69.40		49.86																																																																
<table><tr><td colspan="2">E</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2">Voltage Current Rating:5 AMP. Dielectric Withstanding Voltage:1000V AC Insulation Resistance:5000M Ω Min. Temperature Range:-25℃ to +85℃</td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2">PART NO: B05-0XX5X14D-02</td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2">NO.OF CONTACT: 09 = 9 pos 15 = 15 pos 25 = 25 pos 37 = 37 pos</td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2">HOUSING COLOR: 1 = BLACK 5 = WHITE 6 = BLUE</td><td colspan="2"></td></tr></table>															E								Voltage Current Rating:5 AMP. Dielectric Withstanding Voltage:1000V AC Insulation Resistance:5000M Ω Min. Temperature Range:-25℃ to +85℃						PART NO: B05-0XX5X14D-02						NO.OF CONTACT: 09 = 9 pos 15 = 15 pos 25 = 25 pos 37 = 37 pos						HOUSING COLOR: 1 = BLACK 5 = WHITE 6 = BLUE																																	
E																																																																										
		Voltage Current Rating:5 AMP. Dielectric Withstanding Voltage:1000V AC Insulation Resistance:5000M Ω Min. Temperature Range:-25℃ to +85℃																																																																								
		PART NO: B05-0XX5X14D-02																																																																								
		NO.OF CONTACT: 09 = 9 pos 15 = 15 pos 25 = 25 pos 37 = 37 pos																																																																								
		HOUSING COLOR: 1 = BLACK 5 = WHITE 6 = BLUE																																																																								
<table><tr><td colspan="2">D</td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr></table>															D																																																											
D																																																																										
<table><tr><td colspan="2">C</td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr></table>															C																																																											
C																																																																										
<table><tr><td colspan="2">B</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></table>															B																																																											
B																																																																										
<table><tr><td colspan="2">A</td><td colspan="2">QUALITY SYMBOLS</td><td colspan="2">Tolerance</td><td colspan="2">NAME: D-SUB 车针公头90度插板,铜合锁螺丝 (客户用图)</td><td colspan="2">PART NO. B05-0XX5X14D-02</td><td colspan="2">PART REMARKS</td></tr><tr><td colspan="2"></td><td colspan="2">□: CRITICAL ☒: MAJOR</td><td colspan="2">X. ±0.50 .X ±0.30 .XX ±0.25</td><td colspan="2">REV: A SCALE: N:1</td><td colspan="2">UNIT: mm DATE: 2011/06/12</td><td colspan="2">DRW BY JINGLI CHK BY KING ZHOU</td><td colspan="2">APP BY DRAWING NO. B05-009</td></tr><tr><td colspan="2">SIDE</td><td colspan="2">DATE</td><td colspan="2">DESCRIPTION</td><td colspan="2">APPROVER</td><td colspan="2">ZERO DEFECT S.P.C</td><td colspan="2">4</td><td colspan="2">3</td><td colspan="2">2</td><td colspan="2">1</td></tr></table>															A		QUALITY SYMBOLS		Tolerance		NAME: D-SUB 车针公头90度插板,铜合锁螺丝 (客户用图)		PART NO. B05-0XX5X14D-02		PART REMARKS				□: CRITICAL ☒: MAJOR		X. ±0.50 .X ±0.30 .XX ±0.25		REV: A SCALE: N:1		UNIT: mm DATE: 2011/06/12		DRW BY JINGLI CHK BY KING ZHOU		APP BY DRAWING NO. B05-009		SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT S.P.C		4		3		2		1																	
A		QUALITY SYMBOLS		Tolerance		NAME: D-SUB 车针公头90度插板,铜合锁螺丝 (客户用图)		PART NO. B05-0XX5X14D-02		PART REMARKS																																																																
		□: CRITICAL ☒: MAJOR		X. ±0.50 .X ±0.30 .XX ±0.25		REV: A SCALE: N:1		UNIT: mm DATE: 2011/06/12		DRW BY JINGLI CHK BY KING ZHOU		APP BY DRAWING NO. B05-009																																																														
SIDE		DATE		DESCRIPTION		APPROVER		ZERO DEFECT S.P.C		4		3		2		1																																																										
东莞市箐国电子有限公司																																																																										