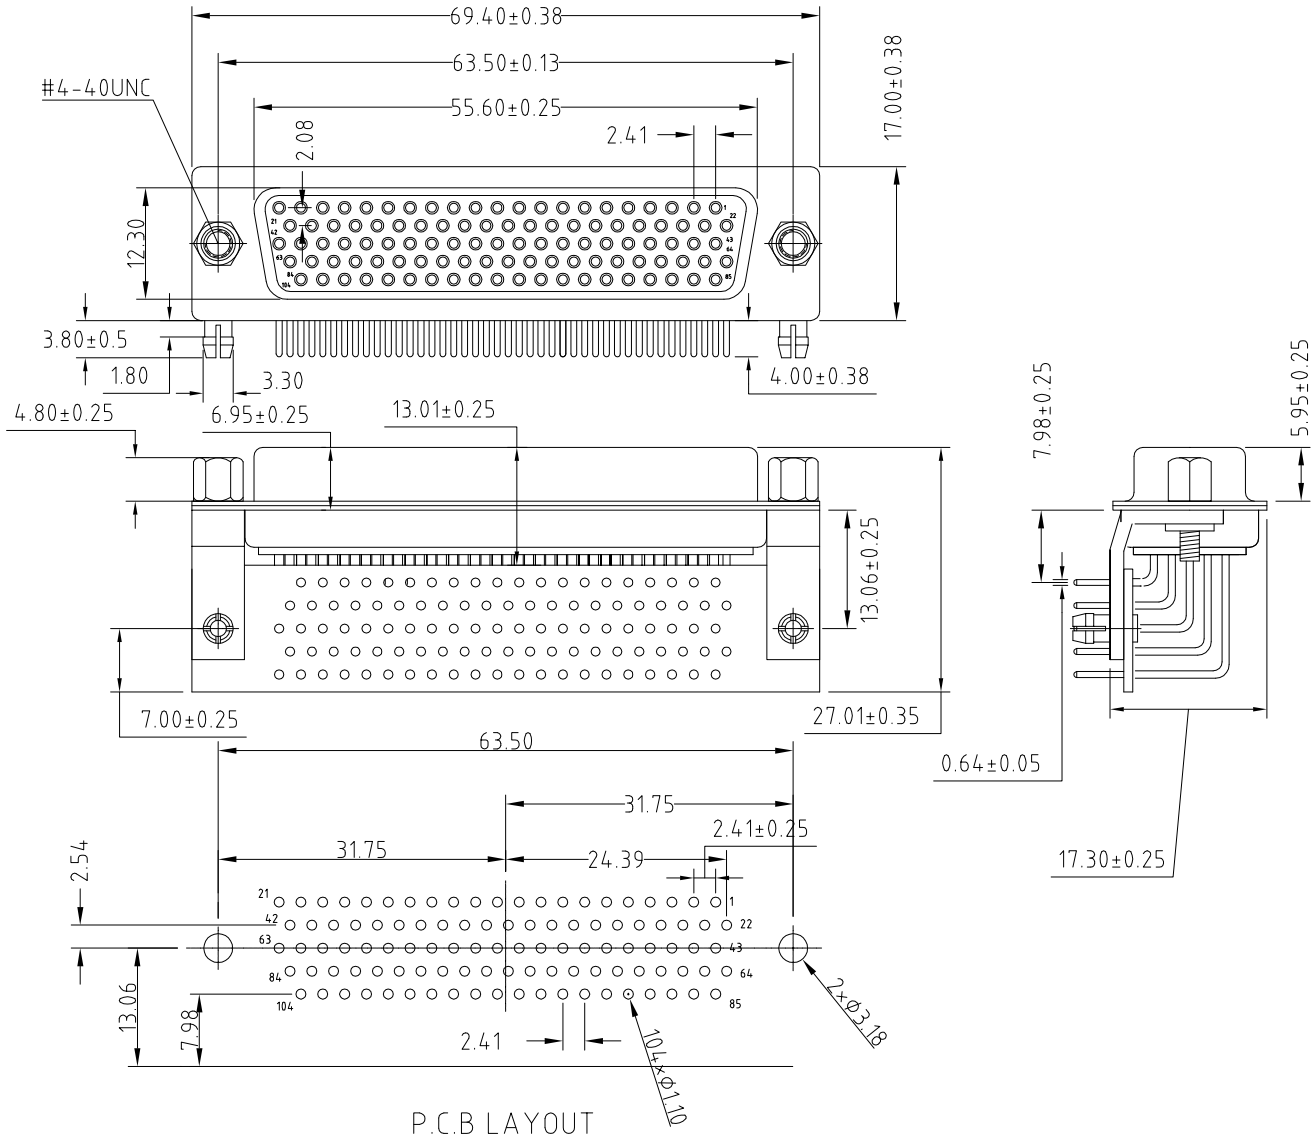

P.C.B LAYOUT

REMARKS:

1. MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHEEL NICKEL FINISHED
NICKEL FINISHED,BACK SHEEL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH

2. ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C

SIDE	DATE	DESCRIPTION	APPROVER
A	2022/03/11	NEW ISSUE	Jack Chen

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance
x. ±0.60
.x ±0.40
.xx ±0.25

PART NAME:	D-SUB 104Pin Female R/A DIP Connector				PART NO:	B05-1046114D-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/03/11	Huangmei	Jack Chen		B05-104

KinKuo 东莞市箐国电子有限公司
www.KinKuo.com