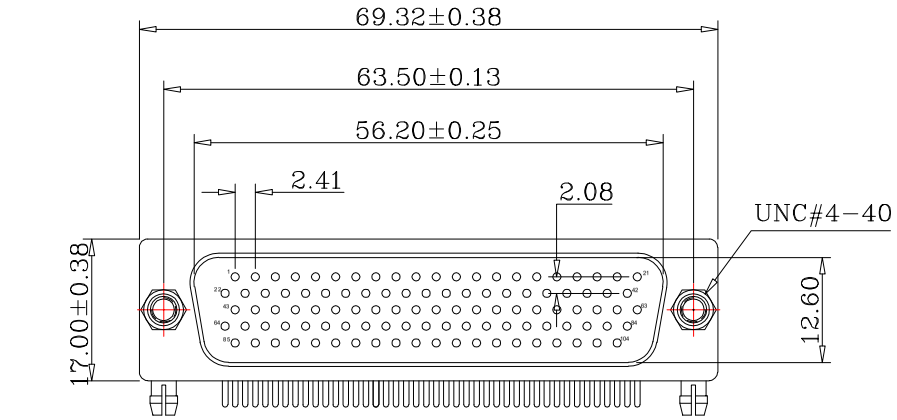

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHEEL NICKEL FINISHED
NICKEL FINISHED,BACK SHEEL TIN FINISHED
INSULATOR : PBT THERMOPLASTIC 30% GLASS FILLED,
UL 94V-0 RATED , BLACK COLOR
CONTACT MATERIAL : BRASS
CONTACT FINISH : FULL GOLD FLASH
RIVITED INSERT : BRASS MATERIAL, NICKEL FINISHED
JACK SCREWS : BRASS MATERIAL , NICKEL FINISHED
WITH #4-40 THREADED RIVETED CLINCH
NUTS ON BACK SHELL

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC MIN.
INSULATION RESISTANCE : 1000MEGOHMS MIN.
TEMPERTURE RATING : -55°C ~ +105°C

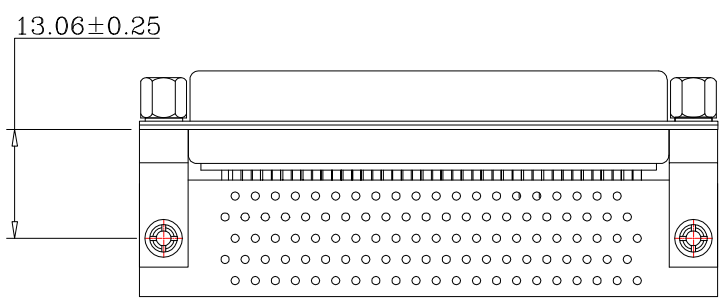

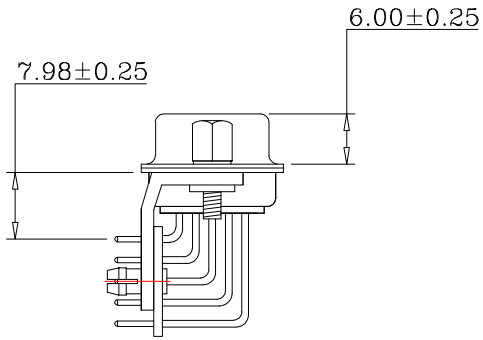

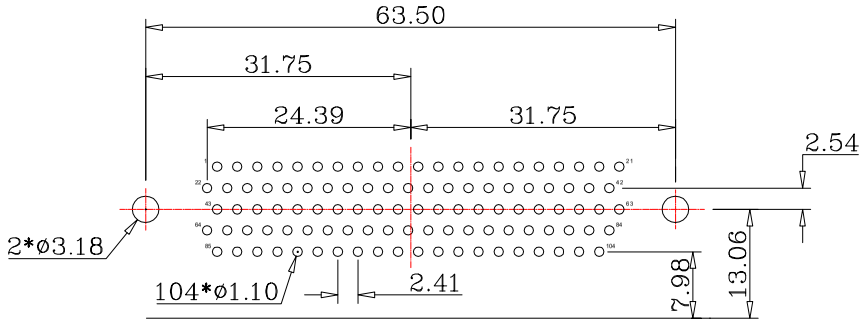

PCB LAYOUT

SIDE	DATE	DESCRIPTION	APPROVER
⚠	2018/03/11	NEW ISSUE	Jack Chen

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	D-SUB 104Pin Male R/A DIP Type			PART NO.	B05-1045114D-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		B05-104

KinKuo 东莞市箐国电子有限公司
www.KinKuo.com